




# GeneratorJoe

Nobody gets the job done like GeneratorJoe!




Made In USA


## Three Phase Generators 3600 RPM 60 Hertz




LR50H208(SHOWN)  
LR50H480  
L28" x W22" x H25"

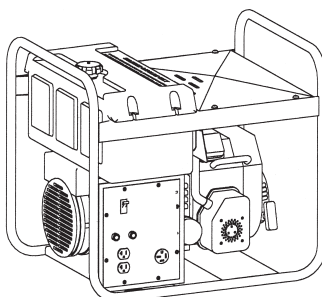

LR80E208(SHOWN) LR120E208  
LR80E480 LR120E480  
L30" x W24" x H25"

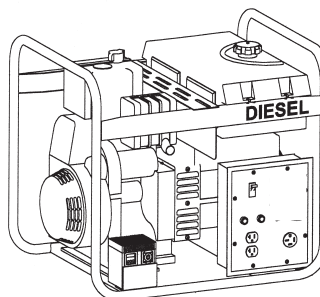

LR50L208(SHOWN)  
LR50L480  
L28" x W22" x H25"

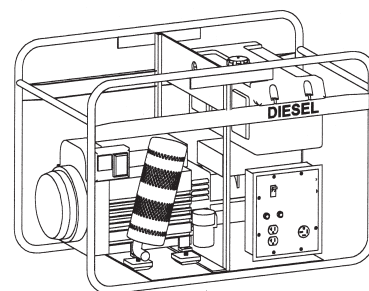

LR120EL208(SHOWN)  
LR120EL480  
L39" x W26" x H29.5"

| Model       | Watts | KVA | Voltage** | Amps | Fuel (Gal.) | RunTime<br>½ Load | RunTime<br>FullLoad | Engine              | DBA  | Net<br>Wt. | Pkd.<br>Wt. |
|-------------|-------|-----|-----------|------|-------------|-------------------|---------------------|---------------------|------|------------|-------------|
| LR50H208    | 5000  | 6.2 | 208       | 17.4 | 5           | 10.4<br>HRS       | 7.6<br>HRS          | 11HP R<br>Honda     | 75   | 179        | 193         |
| LR50H480    | 5000  | 6.2 | 480       | 7.5  | 5           | 10.4<br>HRS       | 7.6<br>HRS          | 11 HP R<br>Honda    | 75   | 179        | 193         |
| LR50L208*   | 5000  | 6.2 | 208       | 17.4 | 5           | 14<br>HRS         | 10.5<br>HRS         | 10 HP E<br>Lomb.    | 77   | 187        | 201         |
| LR50L480*   | 5000  | 6.2 | 480       | 7.5  | 5           | 14<br>HRS         | 10.5<br>HRS         | 10 HP E<br>Lomb.    | 77   | 187        | 201         |
| LR80E208    | 8000  | 10  | 208       | 27.8 | 8           | 9.9<br>HRS        | 6<br>HRS            | 16 HP E<br>Vanguard | 76.5 | 216        | 227         |
| LR80E480    | 8000  | 10  | 480       | 12   | 8           | 9.9<br>HRS        | 6<br>HRS            | 16 HP E<br>Vanguard | 76.5 | 216        | 227         |
| LR120E208   | 12000 | 15  | 208       | 41.6 | 8           | 6.9<br>HRS        | 6<br>HRS            | 23 HP E<br>Vanguard | 77   | 274        | 324         |
| LR120E480   | 12000 | 15  | 480       | 18   | 8           | 6.9<br>HRS        | 6<br>HRS            | 23 HP E<br>Vanguard | 77   | 274        | 324         |
| LR120EL208* | 12000 | 15  | 208       | 41.6 | 8           | 9.6<br>HRS        | 8<br>HRS            | 19 HP E<br>Lomb.    | 81   | 380        | 420         |
| LR120EL480* | 12000 | 15  | 480       | 18   | 8           | 9.6<br>HRS        | 8<br>HRS            | 19 HP E<br>Lomb.    | 81   | 380        | 420         |

**Receptacles**-All 208 Volts use one 15-50R & one 5-20R. All 480 Volts use one L16-20R. Plugs are included for 3 phase receptacles.

**Frames**-1" welded roll cages with isolated recessed control panel.

**Engines**-All engines have low oil shut down. Honda engines are recoil start. Vanguard and Lombardini are electric start. A battery tray is included with all electric start models but the battery is not included.

Gasoline electric start units require a 300 CCA battery Type U1

Diesel electric start units require a 400 CCA battery Type 24 BCI

\* 208 Volt units available in 240 Volts - Consult Factory.

**GeneratorJoe - [www.generatorjoe.net](http://www.generatorjoe.net)**

4016 Quartz Drive, Santa Rosa, CA 95045 USA - Telephone (707) 539-9003 - Email: [sales@generatorjoe.net](mailto:sales@generatorjoe.net)

(A small business owned by a disabled veteran) - All products are proudly Made in the U.S.A.