



GeneratorJoe

Nobody gets the job done like GeneratorJoe!



Made In USA

MEDIUM DUTY GENERATOR SETS


MODELS

LA50, LA50E*, 5000/4000 WATTS

LA55H, LA55V, 5500/4500 WATTS

LA60H, 6000/5000 WATTS


GENERATOR TYPE TOTALLY BRUSHLESS
WITH CAPACITOR, COPPER WINDINGS
VOLTAGE PLUS™ <6% DISTORTION,
EXCLUSIVE SMOOTH WAVE™,
CSA LISTED SELECTED MODELS

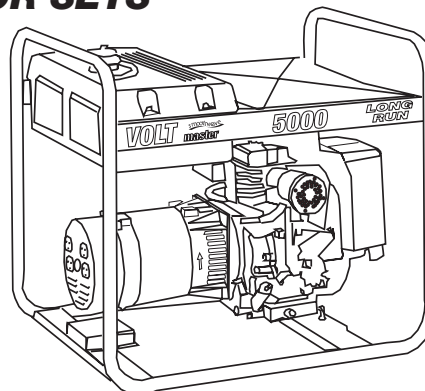

LA50, LA50E, LA55V, LA55H

FRAME SPECIFICATIONS:

NET DIMENSIONS (METRIC)				PACKED DIMENSIONS			
MODEL	L	W	H	L	W	H	CUBIC FT
LA50, LA50E LA55V, LA55H, LA60H	28(71)	22(56)	25(64)	28.5(72)	22.5(57)	25.5(65)	9.5

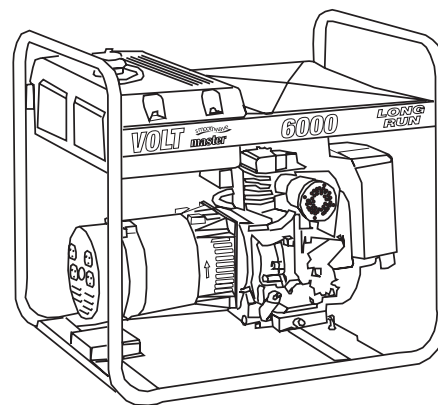

LA60H

MODEL	WATTS		VOLTAGE	RATED AMPS		FREQ.	P H A S E	RPM	ENGINES	WEIGHT	
	MAXIMUM SURGE	RATED CONTINUOUS		@120V	@240V					NET	PKD.
LA50	5000	4000	120/240	33.3	16.7	60Hz	1	3600	8HP B&S 2014	114	127
LA50E	5000	4000	120/240	33.3	16.7	60Hz	1	3600	8HP B&S ELEC ST 2014	123	136
LA55V	5500	4500	120/240	37.5	18.8	60Hz	1	3600	9HP VANG 1854	123	136
LA55H	5500	4500	120/240	37.5	18.8	60Hz	1	3600	9HP HONDA GX270	132	145
LA60H	6000	5000	120/240	41.6	20.8	60Hz	1	3600	11HP HONDA GX340	179	192

RECEPTACLES

1-20 AMP, 120V, DUPLEX (2 OUTLETS)

1-20 AMP, 240V, TWIST LOCK, NEMA L14-20R

CIRCUIT BREAKERS, VIBRATION MOUNTS

PLUGS REQUIRED (NOT SUPPLIED)

5-15P OR 5-20P

L14-20P

STANDARD

FUEL TANK	LA50	LA50E	LA55V	LA55H	LA60H
GALLON	5	5	5	5	5
RUN TIME 1/2 LOAD	8.5	8.5	8.5	10.8	10.4
RUN TIME FULL LOAD	6	6	6	8.3	7.6

ENGINE & DECIBELS (AVERAGE VALUES)	DBA	MODELS	ALL ENGINES FEATURE SOLID STATE IGNITION AND RECOIL STARTERS				DISPLACEMENT
	77	LA50	AT 7 METERS	8 HP, B&S, OHV, RECOIL			305CC
	74	LA50E	AT 7 METERS	8 HP, B&S, OHV, ELECTRIC START*			305CC
	73	LA55V	AT 7 METERS	9 HP, VANGUARD, OHV, RECOIL, LOW OIL SHUT DOWN			296CC
	74	LA55H	AT 7 METERS	9 HP HONDA, OHV, RECOIL, LOW OIL SHUT DOWN			270CC
	75	LA60H	AT 7 METERS	11 HP HONDA, OHV, RECOIL LOW OIL SHUT DOWN			337CC

FRAME: 1" WELDED STEEL ROLL CAGE FRAME

STANDARD

CHANGES: ALL SPECIFICATIONS AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AND THERE IS NO OBLIGATION TO MAKE CHANGES IN UNITS PREVIOUSLY SOLD. **RATINGS:** APPLY TO ALTITUDES UP TO 1000 FEET, STANDARD COOLING, NORMAL AMBIENTS AND GASOLINE FUEL.

REDUCE RATINGS 3-1/2% FOR EACH 1000 FEET ABOVE SEA LEVEL AND 1% FOR EACH 10 FAHRENHEIT RISE ABOVE 60 FAHRENHEIT.

CONNECTION OF A GENERATOR TO A HOME OR BUILDING REQUIRES A TRANSFER SWITCH. CONSULT A QUALIFIED ELECTRICIAN.

*Electric start models are shipped less battery. Required battery 300 cold cranking Amps, 5" Maximum width. Type U1.

GeneratorJoe - www.generatorjoe.net

4016 Quartz Drive, Santa Rosa, CA 95045 USA - Telephone (707) 539-9003 - Email: sales@generatorjoe.net
(A small business owned by a disabled veteran) - All products are proudly Made in the U.S.A.