



GeneratorJoe

Nobody gets the job done like GeneratorJoe!



Made In USA

GENERATORS NATURAL GAS OR L/P

MODELS


LR105E-LP/NG, LR105EI-LP/NG 9000/8500/8000 WATTS

LR150V-LP/NG, 12000/11000/10500 WATTS

GENERATOR TYPE TOTALLY BRUSHLESS
WITH CAPACITOR, COPPER WINDINGS
VOLTAGE PLUS™ <6% DISTORTION,
EXCLUSIVE SMOOTH WAVE™

FRAME SPECIFICATIONS:

NET DIMENSIONS (METRIC)					
MODEL	L	W	H	WEIGHT	
LR105E-LP/NG	30(76)	24(61)	25(64)	234(106)	
LR105EI-LP/NG	30(76)	24(61)	31(79)	290(132)	
LR150V-LP/NG	31(79)	25(64)	26(66)	245(111)	
LR105E-LP/NG	33(84)	25(64)	31(79)	341(155)	
LR105EI-LP/NG				11.7	
LR150V-LP/NG				14.8	

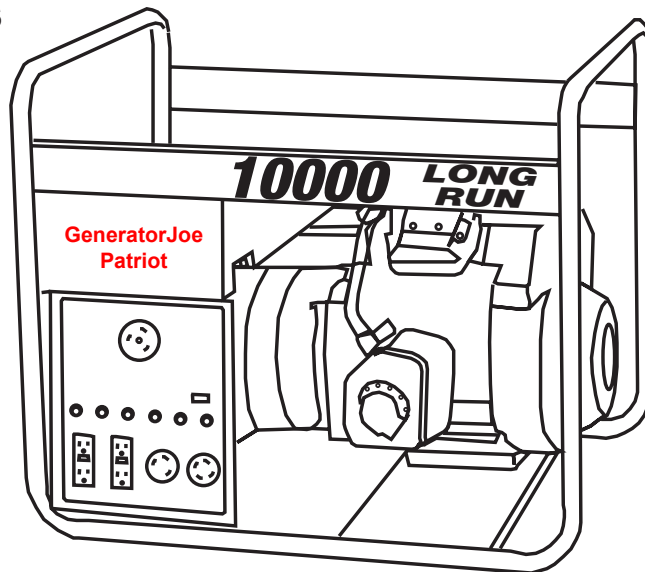

MODEL	WATTS (1)		VOLTAGE	RATED AMPS		FREQUENCY	PHASE	RPM	ENGINE
	MAXIMUM SURGE	RATED CONTINUOUS		@120V	@240V				
LR105E-LP	9000	8500	120/240	70.8	35.4	60Hz	1	3600	480CC VANGUARD
LR105EI-NG	8500	8000	120/240	66.7	33.3	60Hz	1	3600	480CC VANGUARD
LR150V-LP	12,000	11,000	120/240	91.7	45.8	60Hz	1	3600	627CC VANGUARD
LR150V-NG	11,000	10,500	120/240	87.5	43.8	60Hz	1	3600	627CC VANGUARD

RECEPTACLES	LR105E-LP/NG	LR105EI-LP/NG	LR150V-LP	LR150V-NG	PLUGS REQUIRED FOR RECEPTACLES (NOT SUPPLIED)
20AMP, 120V, NEMA, 5-20R, STRAIGHT BLADE WITH (4 OUTLETS 2 DUPLEXES)	2	-	-	-	5-15P OR 5-20P
20AMP, 120V, GFI 5-20R STRAIGHT BLADE WITH (4 OUTLETS 2 DUPLEXES)	-	2	2	2	5-15P OR 5-20P
30 AMP, 120V, TWISTLOCK, NEMA L5-30R (1OUTLET)	1	1	1	1	L5-30P
30 AMP, 240V, TWISTLOCK, NEMA L14-30R (1OUTLET)	1	1	1	1	L14-30P
50 AMP, 120V, TWISTLOCK CS6370	-	-	1	1	CS6361C
50 AMP, 240V, TWISTLOCK CS6369	-	1	1	1	CS6365C (SUPPLIED)
50 AMP, 240V, STRAIGHT BLADE 14-50R	1	-	-	-	14-50P

CIRCUIT BREAKER PROTECTOR FOR EACH RECEPTACLE, FLEX FUEL LINE	STD	STD	STD	STD
HOUR METER, VOLT METER AND EASY IDLE WITH DELAY CIRCUIT	-	STD	STD	STD

FUEL	APPROXIMATE	LR105E-LP	LR105EI-LP	LR150V-LP	LR105E-NG	LR105EI-NG	LR150V-NG
RUN TIME 1/2 LOAD (2)	7.2LBS/HR	1.2 GAL/HR	1.2 GAL/HR	1.6 GAL/HR	145 CUBIC FT HR	145 CUBIC FT HR	190 CUBIC FT HR
RUN TIME FULL LOAD (2)	11.4LBS/HR	1.6 GAL/HR	1.6 GAL/HR	2.2 GAL/HR	200 CUBIC FT HR	200 CUBIC FT HR	264 CUBIC FT HR

ENGINE & DECIBELS (AVERAGE VALUES)	DBA	MODELS	ALL ENGINES FEATURE SOLID STATE IGNITION	CAST IRON CYLINDER LINER
76.5		LR105E-LP/NG AT 7 METERS VANGUARD, OHV, LOW OIL SHUT DOWN, ELECTRIC START, SUPER LOW TONE MUFFLER, INSTALLED SECONDARY FUEL REGULATOR		480 CC
77		LR150V-LP/NG AT 7 METERS VANGUARD, OHV, LOW OIL SHUT DOWN, ELECTRIC START, SUPER LOW TONE MUFFLER, INSTALLED SECONDARY FUEL REGULATOR		627CC

FRAME 1" WELDED STEEL ROLL CAGE FRAME WITH ISOLATED RECESSED CONTROL PANEL

CHANGES: ALL SPECIFICATIONS AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AND THERE IS NO OBLIGATION TO MAKE CHANGES IN UNITS PREVIOUSLY SOLD.
RATINGS: APPLY TO ALTITUDES UP TO 1000 FEET, STANDARD COOLING, NORMAL AMBIENTS AND GASOLINE FUEL. REDUCE RATINGS 3-1/2% FOR EACH 1000 FEET ABOVE SEA LEVEL AND 1% FOR EACH 10 FAHRENHEIT RISE ABOVE 60 FAHRENHEIT. CONNECTION OF A GENERATOR TO A HOME OR BUILDING REQUIRES A TRANSFER SWITCH. CONSULT A QUALIFIED ELECTRICIAN. ONE GALLON OF L.P. GAS EQUALS 4.23 POUNDS. All models electric start battery not included. Requires battery 300 cold cranking Amps, 5" Maximum width Type U1. SMALLER SIZES AVAILABLE CONSULT FACTORY. AN ELECTRIC SOLENOID FOR AUTOMATICALLY SHUTTING OFF THE FUEL IS RECOMMENDED FOR UNATTENDED OPERATI OF L/P OR N/G FUELED GENERATOR SETS. THIS SOLENOID POSITIVELY SHUTS THE FUEL SUPPLY OFF IF THE ENGINE STOPS RUNNING. CONSULT FACTORY. A PRIMARY FUEL REGULATOR CUSTOMER SUPPLIED IS REQUIRED ON INCOMING FUEL LINE.

GeneratorJoe - www.generatorjoe.net

4016 Quartz Drive, Santa Rosa, CA 95045 USA - Telephone (707) 539-9003 - Email: sales@generatorjoe.net
(A small business owned by a disabled veteran) - All products are proudly Made in the U.S.A.