



MODEL # LPT30BRD
120VAC 30 AMPS/POLE



AUTOMATIC TRANSFER SWITCH

- AUTOMATICALLY SWITCHES FROM POWER CORD TO GENERATOR SIMPLY BY STARTING THE GENERATOR
- HEAVY DUTY RELAY ASSEMBLY WILL HANDLE 30 AMP POWER CORD AND UP TO 4.5KW GENERATOR
- DEPENDABLE SWITCHING-TRANSFERS BOTH HOT AND NEUTRAL LEGS BY HEAVY DUTY DPDT RELAY
- DESIGNED WITH A TERMINAL BLOCK TO SIMPLIFY WIRE CONNECTIONS
- BUILT-IN TIME DELAY ALLOWS GENERATOR TO GET UP TO SPEED
- QUICK AND EASY INSTALLATION
- DESIGNED FOR OEM AND AFTERMARKET APPLICATIONS




GeneratorJoe

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax: 707 539-5212
Email: sales@generatorjoe.NET
Web www.generatorjoe.NET

The LPT30BRD is intended for use as an electrical transfer switch to automatically switch multiple sources (from one to another), i.e. switching from shoreline to generator power.

The LPT30BRD is primarily designed for installation in conjunction with a generator having a rated output of no more than 4.5KW and an external power cord having a rated output of no more than 120VAC, 30A, 1PH, 60HZ.

LPT30BRD INSTALLATION

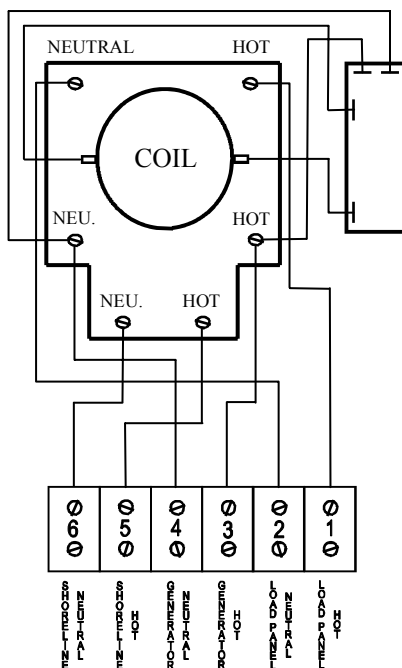

TIMER BOARD PRO-
VIDES 30 SECOND
DELAY, BYPASS FOR
INSTANT TRANSFER.

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax: 707 539-5212
Email: sales@generatorjoe.NET
Web www.generatorjoe.NET

GeneratorJoe



CONTACTORS: General purpose DPDT 30 Amp relay

PHYSICAL SIZE: 8 1/2" X 8 1/2" X 4 1/2"

TIME DELAY: Custom time delay, 30 seconds nominal.
Can be bypassed for instant switching.

RELAY COIL: 110VDC, 2 Watts

KNOCKOUTS: Assorted

WEIGHT: 6.60 lbs

CAUTIONS: ** INSTALL VERTICALLY OR HORIZONTALLY IN A DRY, ACCESSIBLE AREA.

**** MAXIMUM SERVICE 120VAC, 30AMPS SINGLE PHASE: MUST BE USED WITH A CIRCUIT DISTRIBUTION PANEL HAVING A MAIN BREAKER RATED 30AMPS-1 POLE OR SMALLER. SUITABLE FOR INSTALLATION IN CONJUNCTION WITH POWER SUPPLIES HAVING RATED OUTPUTS NO LARGER THAN 120VAC, 30AMPS.**

WARRANTY: The manufacturer warrants that this product shall be free from defects in material and workmanship for one year (twelve months) from date of purchase or eighteen months after date of manufacture, whichever is less. If, after our inspection, a defect is revealed, the unit will be repaired and returned, at our discretion. We will accept up to 1/2 hour (30 minutes) labor for the unit to be changed out or \$18.00, whichever is less. This warranty shall not apply to any product that shows evidence of neglect, misuse, improper installation, or that has been repaired or altered by any other party other than this company. Proof of purchase may be required.