

# WINCO<sup>®</sup>

# HPS12000HE

## Features

### Honda GX630 Engine

You expect the best; you get the best. The Honda GX630 engine has more power, lower fuel consumption, and lower emissions than previous versions.

### Tri-Fuel

Designed to easily transition between three fuel sources; LP, natural gas, and gasoline.

### Low Oil Protection

In the event there is a low oil level, the engine will shut down, to protect the engine from damage.

### Sturdy Wrap-Around Welded Tubular Cradle

We use 14 gauge steel for dependable durability.

### 12 Gallon Fuel Tank

The EPA-approved steel fuel tank design eliminates hydrocarbon emissions.

### Premium Square D Circuit Breakers

Square D is the industry leader in circuit breaker protection.


### 100% Load Tested

Every generator is fully tested prior to leaving our facility.

## HOME POWER<sup>®</sup>

**12,000 Surge Watts**

**10,800 Continuous Watts**

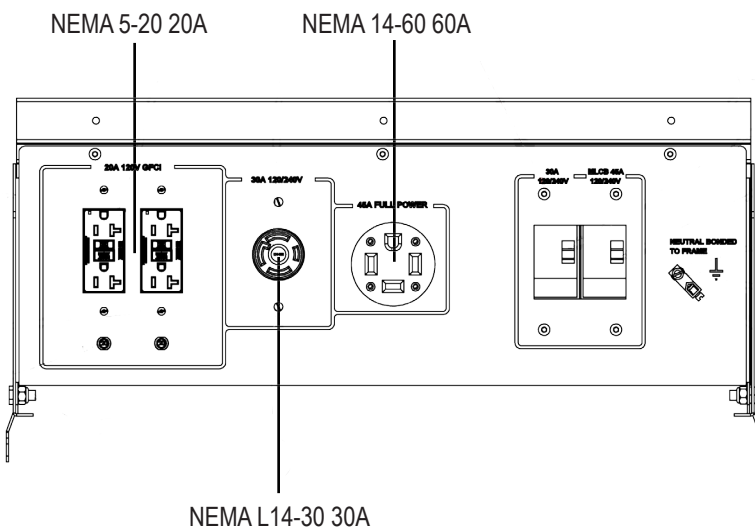

## Optional Accessories

### Four Wheel, Flat-Free Dolly Kit

Portability is important to get your generator where it needs to be.

### Generator Cover

When your generator is not in use, a cover will keep it dust and debris free.

### Plug-In Line Voltage Monitor

For when you want to verify the voltage output.

### WINCO Emergency Transfer Service Kit

You will be able to set up your generator quickly and safely to restore power to critical circuit breakers.

### 60 Amp (NEMA 14-60P) Plug

You supply the length of cord you need. We offer the plug.

### Low Pressure Fuel Solenoid

For peace of mind when you have to run your generator unattended.

### Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

### Battery

Interstate U1 300 CCA.

# SPECIFICATIONS

# HPS12000HE

## GENERATOR

SURGE WATTS <sup>(1)</sup>	12,000
CONTINUOUS WATTS <sup>(1)</sup>	10,800
CONTINUOUS AMPS <sup>(1)</sup>	90/45
OUTPUT	120/240 V
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION	+/-3%
MAIN CIRCUIT BREAKER	45 AMP
NEUTRAL BONDED	YES
120 VOLT RECEPTACLES	(2) NEMA 5-20 20A DUPLEX
120/240 VOLT RECEPTACLES	(1) NEMA L14-30 30A (1) NEMA 14-60 60A
LIFTING EYE	NO
4-WHEEL DOLLY KIT	STANDARD
PROTECTIVE ROLL FRAME	14 GAUGE STEEL
GENERATOR WARRANTY <sup>(2)</sup>	2 YRS RESIDENTIAL

NOTES: (1) Based on gasoline fuel. Derate 10% for LP Gas and 20% for Natural Gas. (2) For complete generator warranty information, refer to the HPS12000HE manual.

## SHIPPING

DIMENSIONS (LxWxH)(W/ DOLLY KIT)	44.7" x 36" x 33"
NET WEIGHT	425 LBS
SHIPPING DIMENSIONS	50" x 40" x 36"
SHIP WEIGHT	460 LBS
FREIGHT CLASS	70

## ENGINE

ENGINE BRAND	HONDA
ENGINE MODEL	GX630
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	V-TWIN
DISPLACEMENT/TYPE	688 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL	10W-30
OIL CAPACITY	1.7 QTS
dBA AT 7 METERS	78
MOTOR STARTING (CODE G) <sup>(1)</sup>	5 HP
BATTERY SIZE <sup>(2)</sup>	BCI U1 300 CCA
EPA APPROVED	YES
CARB APPROVED	NO
CSA APPROVED	NO
UL LISTED	NO
ENGINE WARRANTY <sup>(3)</sup>	3 YRS RESIDENTIAL

NOTES: (1) Code G capacitor start motor. (2) Battery not included (3) Contact your local Honda service center for engine warranty assistance.

## FUEL

FUEL TANK	15 GAL
FUEL GAUGE	ON TANK
FUEL USE: GASOLINE	1.67 GAL/HR
NATURAL GAS	200 FT <sup>3</sup> /HR - 204,000 BTU/HR
LP	2.2 GAL/HR - 201,304 BTU/HR



# GeneratorJoe®

## GeneratorJoe®

4723 Muirfield Court  
Santa Rosa, CA 95405  
Phone: 707 542-2224

Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)

Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)