



Exclusively from your Caterpillar® dealer

Generator Joe



STANDBY 10-15 kW
PRIME 9-13.5 kW
60 Hz

Model	Standby — kW (kVA)		Prime — kW (kVA)	
	LP	Natural	LP	Natural
G10U3S	10 (10)	10 (10)	9 (9)	9 (9)
G12U3	12 (15)	12 (15)	11 (13.8)	11 (13.8)
G15U3	15 (18.8)	15 (18.8)	13.5 (16.9)	13.2 (16.5)
G15U3S	15 (15)	15 (15)	13.5 (13.5)	13 (13)

FEATURES

GENERATOR SET

- Complete system designed and built at ISO 9001 certified facilities
- Factory tested to design specifications at full load conditions

ENGINE

- Governor, Woodward electronic
- Electrical system, 12 VDC
- Cartridge type filters
- Natural gas fuel system, LP gas options available
- Gas shutoff valve, solenoid operated
- Gas pressure regulator
- Low oil pressure shutdown

GENERATOR

- Insulation system, class H
- Drip proof generator air intake (NEMA 2, IP23)
- Electrical design in accordance with BS5000 Part 99, IEC60034-1, EN61000-6, NEMA MG-1.33, UTE51100

AUTOMATIC VOLTAGE REGULATOR

- Voltage within ± 0.5% 3 Phase and ± 1.0% Single Phase at steady state from no load to full load
- Provides fast recovery from transient load changes

COOLING SYSTEM

- Radiator and cooling fan complete with protective guards
- Standard ambient temperatures up to 110° F (43° C)
- High coolant temperature shutdown
- Low coolant level shutdown
- Low coolant temperature alarm

MOUNTING ARRANGEMENT

- Heavy-duty fabricated steel base with lifting points
- Anti-vibration pads to ensure vibration isolation
- Battery, rack, and cables
- Coolant and lube oil drains piped to edge of base
- Complete OSHA guarding

- Stub-up pipe ready for connection to silencer pipework
- Weather protective enclosures are available
- Fuel line terminated at base with NPT connections

CIRCUIT BREAKER

- 3-pole with solid neutral, UL/CSA listed
- NEMA 1 steel enclosure, vibration isolated
- Electrical stub-up area directly below circuit breaker

CONTROL SYSTEM

- 2001K Autostart control panel
- Vibration isolated NEMA 1 enclosure with hinged access door
- Engine and generator instrumentation
- Volts adjust potentiometer
- Safety shutdown and alarm indicators
- Audible alarm for all faults
- Volt-free contact for common alarm
- AC/DC wiring with multi-pin connectors for system flexibility

EQUIPMENT FINISH

- All electroplated hardware
- Anticorrosive protection prior to painting
- High gloss polyurethane paint for durability and scuff resistance

QUALITY STANDARDS

- BS4999, BS5000, BS5514, IEC60034, EN61000-6, NEMA MG1-33, ISO8528, NFPA 110 (with optional equipment)

DOCUMENTATION

- Operation and maintenance manuals provided
- Wiring diagrams included

WARRANTY

- All equipment carries full manufacturer's warranty
Extended warranty terms available

Materials and specifications are subject to change without notice.

STANDBY 10 - 15 kW
PRIME 9 - 13.5 kW
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

OPTIONAL EQUIPMENT*

ENCLOSURE

- Weatherproof enclosure (includes internal silencer system)
- Sound attenuated enclosure (includes internal silencer system)

SILENCER SYSTEM — OPEN UNIT

- Level 1 silencer
- Level 2 silencer
- Level 3 silencer
- Mounting kit
- Through-wall installation kit

ENGINE

- Battery heater
- Lube oil sump heater, 110/120V

SKIDBASE ACCESSORIES

- Seismic vibration isolators (Zone 4)

GENERATOR

- Anti-condensation heater

COOLING SYSTEM

- Coolant heater, 110/120V
- Radiator transition flange

CONTROL SYSTEM

- Access 4000 control system
- Circuit breaker auxiliary contacts, volt free
- Static battery charger
- UL listed static battery chargers

FUEL SYSTEM

- LP gas (vapor)
- LP gas (liquid)

MISCELLANEOUS ACCESSORIES

- Toolkit
- Additional operator's manual pack
- CSA certification
- French or Spanish Language labels

EXTENDED WARRANTY

- 36 months
- 48 months
- 60 months
(See warranty policy for details of coverage)

TESTING


- Special factory test available

*Some options may not be available on all models. Not all options are listed.

4016 Quartz Drive
 Santa Rosa, CA 95405
 Phone: 707 539-9003
 Fax: 707 539-5212

Email: sales@generatorjoe.NET
 Web www.generatorjoe.NET

GENERATOR SET DIMENSIONS AND WEIGHTS

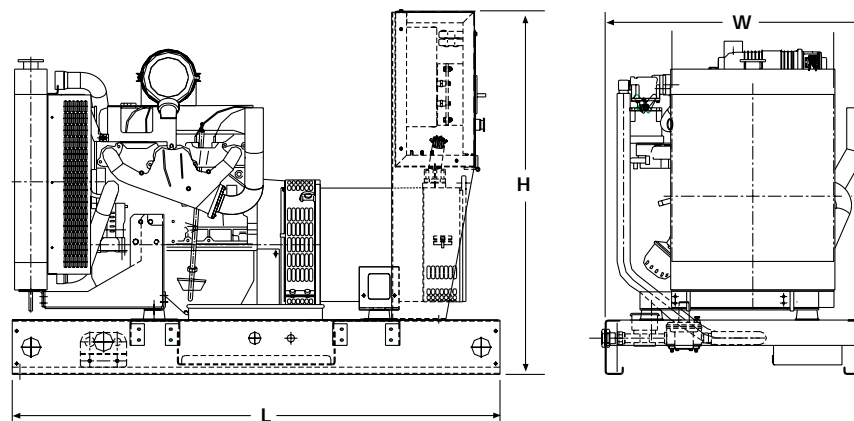

Model	Length in (mm)	Width in (mm)	Height in (mm)	Weight lbs (kg)**
G10U3S	53.1 (1348)	28 (710)	39.6 (1004)	858 (390)
G12U3	53.1 (1348)	28 (710)	39.6 (1004)	858 (390)
G15U3	53.1 (1348)	28 (710)	39.6 (1004)	891 (405)
G15U3S	53.1 (1348)	28 (710)	39.6 (1004)	891 (405)

NOTE: General configuration not to be used for installation. See specific dimensional drawings for detail.

**Includes oil and coolant

GeneratorJoe

STANDBY 10 kW
PRIME 9 kW
60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

G10U3S (1-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		LP Gas		Natural Gas	
		Standby	Prime	Standby	Prime
Power Rating (at 240V)	kW (kVA)	10.0 (10.0)	9.0 (9.0)	10.0 (10.0)	9.0 (9.0)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Type Required: API CF-4 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	Cfh (m³/hr) Cfh (m³/hr) Cfh (m³/hr)	57.9 (1.64) 44.5 (1.3) 31.1 (0.9)	52.5 (1.5) 40.5 (1.15) 28.4 (0.8)	160 (4.5) 123 (3.5) 86 (2.4)	145 (4.1) 112 (3.2) 78.7 (2.2)
Engine Electrical System Ignition System: Electronic, Distributorless Voltage/Ground: 12/Negative Battery Charging Generator Ampere Rating	Amps	45	45	45	45
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) Ft H ₂ O (m H ₂ O) U.S. gal/min (L/min) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) Hp (kW)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.3 (2.4) 645 (11.3) 368.5 (6.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 585 (10.3) 334 (5.9) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.7 (2.6) 645 (11) 368.5 (6.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 585 (10.3) 334 (5.9) 1.2 (0.9)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air (zero restriction) Generator Cooling Air Allowable Air Flow Restriction (After radiator) Cooling Airflow (@ rated speed) Rate with restriction	Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min) Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min)	35.3 (1.0) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	31.8 (0.9) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	35.3 (1.0) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	31.8 (0.9) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	In Hg (kPa) Cfm (m³/min) °F (°C)	5.1 (17.3) 101.5 (2.9) 1039 (559)	5.1 (17.3) 94.1 (2.7) 1030 (554)	5.1 (17.3) 110.0 (3.1) 1062 (572)	5.1 (17.3) 102.9 (2.9) 1067 (575)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	84.7	84.2	84.7	84.2

Generator Technical Data		120/240V	110/220V
Motor Starting Capability: (kVA) Self Excited		13	11
Full Load Efficiencies:	Standby Prime	84.6 84.6	82.9 82.9
Reactances (per unit):	X _d X' _d X'' _d X _q X'' _q	1.46 0.27 0.131 0.73 0.187	1.74 0.32 0.156 0.86 0.222
Time Constants:	t' _d 40 ms	t'' _d 6 ms	t' _{do} 280 ms t _a 8 ms

* dB(A) levels are for guidance only



Generator Joe

STANDBY 12 kW
PRIME 11 kW
60 Hz



OLYMPIAN™

Exclusively from your Caterpillar® dealer

G12U3 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		LP Gas		Natural Gas	
		Standby	Prime	Standby	Prime
Power Rating (at 240V)	kW (kVA)	12.0 (15.0)	11.0 (13.8)	12.0 (15.0)	11.0 (13.8)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Type Required: API CF-4 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	Cfh (m³/hr) Cfh (m³/hr) Cfh (m³/hr)	68 (1.9) 52.5 (1.5) 36.5 (1.0)	63.2 (1.8) 48.5 (1.4) 33.8 (1.0)	190 (5.4) 145 (4.1) 101 (2.9)	175 (5.0) 134 (3.8) 93.5 (2.7)
Engine Electrical System Ignition System: Electronic, Distributorless Voltage/Ground: 12/Negative Battery Charging Generator Ampere Rating	Amps	45	45	45	45
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) Ft H ₂ O (m H ₂ O) U.S. gal/min (L/min) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) Hp (kW)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 764 (13.4) 437 (7.7) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 705 (12.4) 407 (7.1) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 764 (13.4) 437 (7.7) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 705 (12.4) 407 (7.1) 1.2 (0.9)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air (zero restriction) Generator Cooling Air Allowable Air Flow Restriction (After radiator) Cooling Airflow (@ rated speed) Rate with restriction	Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min) Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min)	55.8 (1.6) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	52.4 (1.5) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	55.8 (1.6) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	52.4 (1.5) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	In Hg (kPa) Cfm (m³/min) °F (°C)	5.1 (17.3) 166 (4.7) 1070 (593)	5.1 (17.3) 153.4 (4.3) 1061 (572)	5.1 (17.3) 166 (4.7) 1090 (588)	5.1 (17.3) 157.2 (4.5) 1076 (580)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	84.7	84.2	84.7	84.2

Generator Technical Data	277/480V	120/240V 120/208V		
Motor Starting Capability: (kVA) Self Excited	28	21		
Full Load Efficiencies: Standby Prime	84.4 84.9	83.4 83.9		
Reactances (per unit): X _d X' _d X'' _d Reactances shown are applicable to the LPG standby rating X _q X'' _q X ₂ X ₀	1.93 0.14 0.071 0.96 0.100 0.085 0.004	2.57 0.19 0.095 1.28 0.133 0.113 0.005		
Time Constants:	t' _d 25 ms	t'' _d 2.5 ms	t' _{do} 337 ms	t _a 4 ms

* dB(A) levels are for guidance only

STANDBY 15 kW
PRIME 13.5 kW
60 HZ



OLYMPIAN™

Exclusively from your Caterpillar® dealer

G15U3 (3-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		LP Gas		Natural Gas	
		Standby	Prime	Standby	Prime
Power Rating (at 240V)	kW (kVA)	15.0 (18.8)	13.5 (16.9)	15.0 (18.8)	13.2 (16.5)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Type Required: API CF-4 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	Cfh (m³/hr) Cfh (m³/hr) Cfh (m³/hr)	84.6 (2.4) 64.5 (1.8) 44.5 (1.3)	76.6 (2.2) 58.5 (1.7) 40.5 (1.2)	234 (6.6) 178.5 (5.1) 123 (3.5)	211.8 (6.0) 162 (4.6) 112 (3.2)
Engine Electrical System Ignition System: Electronic, Distributorless Voltage/Ground: 12/Negative Battery Charging Generator Ampere Rating	Amps	45	45	45	45
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) Ft H ₂ O (m H ₂ O) U.S. gal/min (L/min) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) Hp (kW)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 5.0 (2.8) 943 (16.6) 539 (9.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 855 (15) 488 (8.6) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 5.0 (2.8) 943 (16.6) 539 (9.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 855 (15) 488 (8.6) 1.2 (0.9)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air (zero restriction) Generator Cooling Air Allowable Air Flow Restriction (After radiator) Cooling Airflow (@ rated speed) Rate with restriction	Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min) Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min)	55.8 (1.6) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	50.1 (1.4) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	53.3 (1.5) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	50.1 (1.4) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	In Hg (kPa) Cfm (m³/min) °F (°C)	5.1 (17.3) 170.5 (4.8) 1100 (593)	5.1 (17.3) 150.6 (4.3) 1083 (584)	5.1 (17.3) 170.5 (4.8) 1133 (612)	5.1 (17.3) 150.6 (4.3) 1083 (584)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	84.7	84.2	84.7	84.2

Generator Technical Data	277/480V	120/240V 120/208V
Motor Starting Capability: (kVA) Self Excited	51	39
Full Load Efficiencies: Standby Prime	88.8 89.0	88.0 88.4
Reactances (per unit): Reactances shown are applicable to the LPG standby rating	X _d 1.47 X' _d 0.09 X'' _d 0.045 X _q 0.74 X'' _q 0.063 X ₂ 0.054 X ₀ 0.004	1.96 0.12 0.060 0.98 0.084 0.072 0.005
Time Constants:	t' _d 25 ms	t'' _d 2.5 ms t' _{do} 409 ms t _a 4 ms

* dB(A) levels are for guidance only

GeneratorJoe

STANDBY
PRIME
60 HZ

15 kW
13.5 - 13 kW

OLYMPIAN™

Exclusively from your Caterpillar® dealer

G15U3S (1-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		LP Gas		Natural Gas	
		Standby	Prime	Standby	Prime
Power Rating (at 240V)	kW (kVA)	15.0 (15.0)	13.5 (13.5)	15.0 (15.0)	13.0 (13.0)
Lubricating System Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Type Required: API CF-4 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)
Fuel System Generator Set Fuel Consumption 100% Load 75% Load 50% Load	Cfh (m³/hr) Cfh (m³/hr) Cfh (m³/hr)	84.6 (2.4) 64.5 (1.8) 44.5 (1.3)	76.6 (2.2) 58.5 (1.7) 40.5 (1.2)	234 (6.6) 178.5 (5.1) 123 (3.5)	204.4 (5.8) 156.3 (4.4) 108.3 (3.1)
Engine Electrical System Ignition System: Electronic, Distributorless Voltage/Ground: 12/Negative Battery Charging Generator Ampere Rating	Amps	45	45	45	45
Cooling System Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) Ft H ₂ O (m H ₂ O) U.S. gal/min (L/min) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) Hp (kW)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 5.0 (2.8) 943 (16.6) 539 (9.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 855 (15) 488 (8.6) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 5.0 (2.8) 943 (16.6) 539 (9.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 795 (14) 421 (7.4) 1.2 (0.9)
Air Requirements Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air (zero restriction) Generator Cooling Air Allowable Air Flow Restriction (After radiator) Cooling Airflow (@ rated speed) Rate with restriction	Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min) Cfm (m³/min) In H ₂ O (kPa) Cfm (m³/min)	57.2 (1.6) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	51.5 (1.4) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	57.2 (1.6) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)	51.5 (1.4) 5.9 (1.5) 2670 (75.6) 381 (10.8) 0.5 (0.125) 2224 (63)
Exhaust System Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	In Hg (kPa) Cfm (m³/min) °F (°C)	5.1 (17.3) 170.5 (4.8) 1100 (593)	5.1 (17.3) 150.6 (4.3) 141.2 (410)	5.1 (17.3) 170.5 (4.8) 1133 (612)	5.1 (17.3) 148.6 (4.2) 1121 (605)
Generator Set Noise Rating* (Without Attenuation) at 3 ft (1 m)	dB(A)	84.7	84.2	84.7	84.2

Generator Technical Data		120/240V	110/220V
Motor Starting Capability: (kVA) Self Excited		29	26
Full Load Efficiencies:	Standby Prime	87.0 87.3	85.5 86.1
Reactances (per unit):	X _d X' _d X'' _d X _q X'' _q	1.25 0.22 0.104 0.62 0.147	1.49 0.26 0.123 0.74 0.175
Time Constants:	t' _d 40 ms	t'' _d 6 ms	t' _{do} 360 ms t _a 8 ms

* dB(A) levels are for guidance only

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax: 707 539-5212
Email: sales@generatorjoe.NET
Web www.generatorjoe.NET



GeneratorJoe

LEHX9522-06 (10-03)