




GeneratorJoe®



Made in the USA!



Shown with optional equipment

Centurion "C" Series Model: 200 CC & CC3

Ratings Diesel

Single and/or Three Phase Available

		60 Hz	50 Hz
Standby:	kW	200.0	166.7
	kVA	250.0	208.3
Prime:	kW	180.0	150.0
	kVA	225.0	187.5

Features

- Single source responsibility for the generator set and accessories.
- Prototype and production tested to insure one step load acceptance per NFPA 110.
- Five year limited warranty on generator sets and accessories.
- Unit conforms to CSA, NEMA, EGSA, ANSI and other standards.
- Heavy duty 4 cycle industrial engine for reliability and fuel efficiency.
- Brushless rotating field generator with class H insulation.
- Heavy duty steel base with integral vibration isolators.
- Electronic Isochronous Governor.
- EPA Emissions Certified
- UL 2200 Available

Generator	Voltage	PH	Hz	Standby Rating		Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
UCI274J311	277/480	3	60	200/250	301	180/225	271
	139/240	3	60	200/250	602	180/225	542
	254/440	3	60	200/250	328	180/225	296
	127/220	3	60	200/250	657	180/225	591
	240/416	3	60	200/250	347	180/225	313
	120/208	3	60	200/250	695	180/225	625
	120/240	3	60	200/250	602	180/225	542
	219/380	3	60	200/250	380	180/225	219
	120/240	1	60	160/160	667	150/150	625
HCI444E06	120/240	1	60	200/200	833	160/160	667



RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor.

STANDBY RATINGS: Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271.

PRIME POWER RATINGS: Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1, BS5514, AS2789, and DIN 6271. For limited running time and base load ratings consult the factory. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

GENERAL GUIDELINES FOR DERATION: Altitude: Derate 0.5% per 100m (328 ft.) elevation above 1000m (3279 ft.) Temperature: Derate 1.0% per 10°C (18°F) temperature above 40°C (104°F).


Engine Application Data

	Cummins Inc. Columbus, Indiana 47202-3005	Basic Engine Model: QSB7-G5 NR3	Curve Number: FR-92278	G-DRIVE QSB 1
	Engine Data Sheet	Engine Critical Parts List: CPL: 42605	Date: 12Dec07	
Displacement : 6.69 litre (408 in ³)		Bore : 107 mm (4.21 in.) Stroke : 124 mm (4.88 in.)		
No. of Cylinders : 6		Aspiration : Turbocharged and Air to Air Aftercooled		

Engine Speed rpm	Standby Power		Prime Power		Continuous Power	
	kWm	hp	kWm	hp	kWm	hp
1500	213	285	182	244	152	204
1800	242	324	208	279	164	220


Engine Performance Data @ 1500 rpm

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	hp	kg/ kWm-h	lb/ hp-h	litre/ hour	US gal/ hour
STANDBY POWER						
100	213	285	0.203	0.334	51	13.4
PRIME POWER						
100	182	244	0.210	0.346	45	11.9
75	137	183	0.223	0.367	36	9.5
50	91	122	0.246	0.404	26	6.9
25	46	61	0.240	0.394	13	3.4
CONTINUOUS POWER						
100	152	204	0.221	0.364	40	10.5

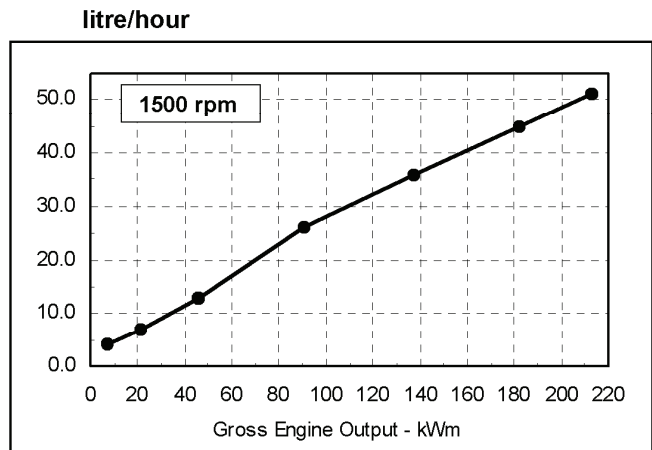

Engine Performance Data @ 1800 rpm

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	hp	kg/ kWm-h	lb/ hp-h	litre/ hour	US gal/ hour
STANDBY POWER						
100	242	324	0.206	0.339	59	15.5
PRIME POWER						
100	208	279	0.206	0.339	50	13.3
75	156	209	0.219	0.360	40	10.6
50	104	140	0.242	0.398	30	7.8
25	52	70	0.245	0.404	15	4.0
CONTINUOUS POWER						
100	164	220	0.216	0.355	42	11.0

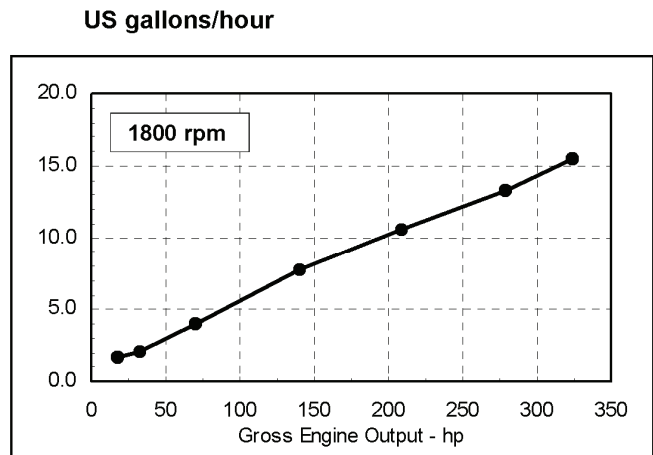

CONVERSIONS: (litres = US Gal x 3.785) (US Gal = litres x 0.2642)

Data Subject to Change Without Notice

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. **STANDBY POWER RATING:** Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating. This rating should be applied where reliable utility power is available. A Standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency. **PRIME POWER RATING:** Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories: **UNLIMITED TIME RUNNING PRIME POWER:** Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year. **LIMITED TIME RUNNING PRIME POWER:** Limited Time Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating. **CONTINUOUS POWER RATING:** Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

Reference AEB 10.47 for determining Electrical Output.

Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2. Derates shown are based on 15 in H₂O air intake restriction and 2 in Hg exhaust back pressure.

The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/litre (7.1 lbs/US gal). Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.

Data Status: --Limited-Production--

Data Tolerance: ± 5%




Chief Engineer:

Engine Application Data




QSB7-G5 NR3

G-DRIVE
QSB
2

1500 rpm Derate Curves

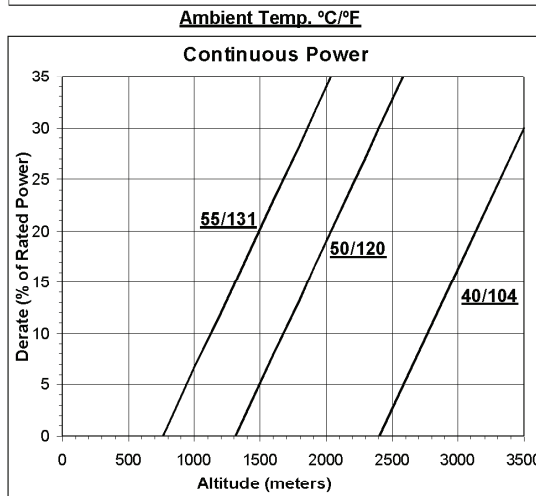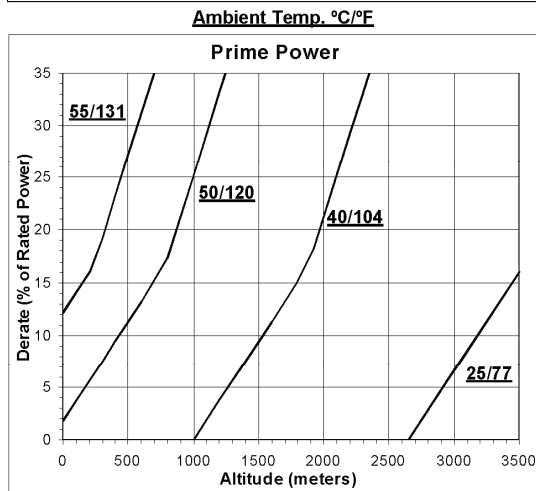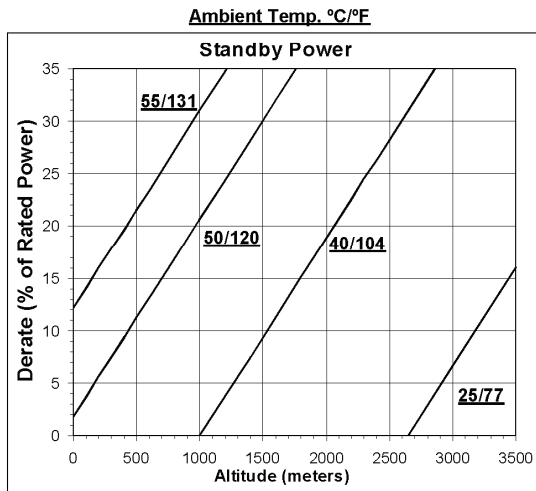

1800 rpm Derate Curves

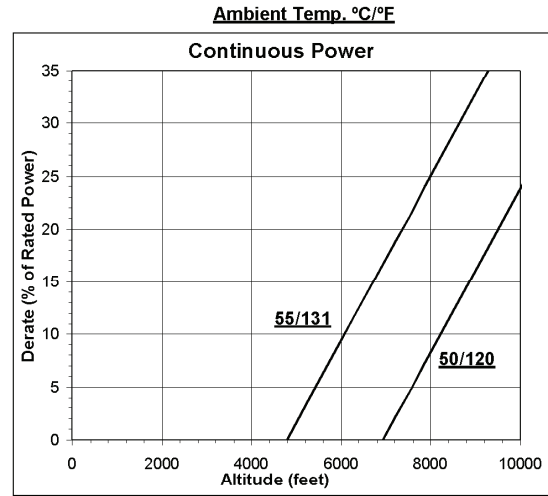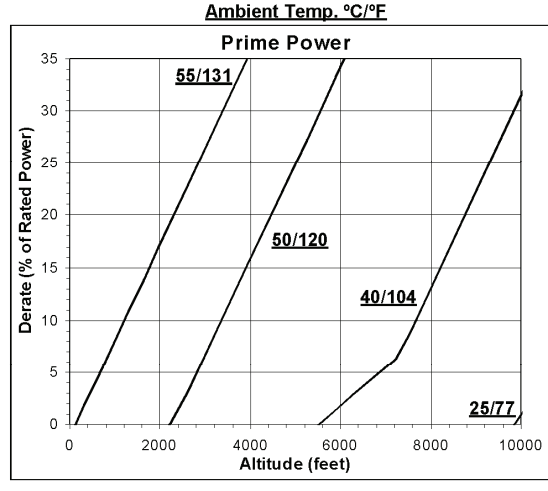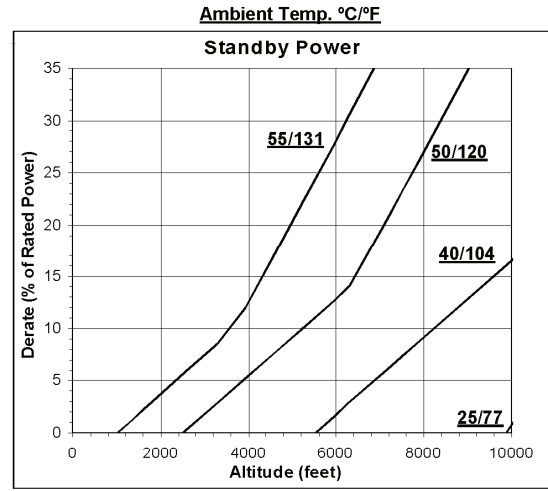

Operation At Elevated Temperature And Altitude:

For **Standby Operation** above these conditions, derate by an additional 6% per 300 m (1000 ft), and 21% per 10° C (18° F).
 For **Prime Operation** above these conditions, derate by an additional 12% per 300 m (1000 ft), and 43% per 10° C (18° F).
 For **Continuous Operation** above these conditions, derate by an additional 8% per 300 m (1000 ft), and 30% per 10° C (18° F).

Operation At Elevated Temperature And Altitude:

For **Standby Operation** above these conditions, derate by an additional 8% per 300 m (1000 ft), and 34% per 10° C (18° F).
 For **Prime Operation** above these conditions, derate by an additional 9% per 300 m (1000 ft), and 40% per 10° C (18° F).
 For **Continuous Operation** above these conditions, derate by an additional 8% per 300 m (1000 ft), and 34% per 10° C (18° F).

Engine Application Data

G-DRIVE
QSB
3

Cummins Inc. Engine Data Sheet

ENGINE MODEL : **QSB7-G5 NR3** CONFIGURATION NUMBER : D313007GX03

DATA SHEET : DS-92278

DATE : 12Dec07

PERFORMANCE CURVE : FR-92278

INSTALLATION DIAGRAM

• Fan to Flywheel:

CPL NUMBER

• Engine Critical Parts List: 42605

GENERAL ENGINE DATA

Type	4-Cycle; In-line; 6-Cylinder Diesel
Aspiration	Turbocharged and Charge Air Cooled
Bore x Stroke	4.21 x 4.88 (107 x 124)
Displacement	408 (6.69)
Compression Ratio	17.2 : 1
Dry Weight (Approximate), Fan to Flywheel Engine	1047 (475)
Wet Weight (Approximate), Fan to Flywheel Engine	1069 (485)
Moment of Inertia of Rotating Components	
• with FW 9857 Flywheel	24.7 (1.55)
• with FW 9878 Flywheel	36.8 (2.47)
Center of Gravity from Rear Face of Block	13.7 (348)
Center of Gravity Above Crankshaft Centerline	5.91 (150)
Maximum Static Loading at Rear Main Bearing	N/A (N/A)

ENGINE MOUNTING

Maximum Bending Moment at Rear Face of Block	1000 (1356)
--	-------------

EXHAUST SYSTEM

Maximum Back Pressure	3 (10.2)
-----------------------------	----------

AIR INDUCTION SYSTEM

Maximum Intake Air Restriction	
• with Dirty Filter Element	25 (6.2)
• with Clean Filter Element	15 (3.7)

COOLING SYSTEM

Jacket Water Circuit Requirements

Coolant Capacity — Engine Only	2.7 (10.2)
Maximum Static Head of Coolant Above Engine Crank Centerline	60 (18.3)
Standard Thermostat (Modulating) Range	175-203 (79-95)
Minimum Pressure Cap	15 (103)
Maximum Top Tank Temperature for Standby / Prime Power	233/225 (112/107)
Maximum Coolant Friction Head External to Engine	5 (35)

Charge Air Cooler Requirements

Maximum Temp. Rise Between Engine Air Intake and Intake Manifold - 1500/1800 rpm	45 (25)
Maximum Air Pressure Drop from Turbo Air outlet to Intake Manifold - 1500/1800 rpm	2.5/4 (8.5/13.5)
Maximum Intake Manifold Temperature @ 77 °F (25 °C) ambient - 1500/1800 rpm	122 (50)
Maximum Intake Manifold Temperature for engine protection (Shut Down Threshold)	203 (95)

LUBRICATION SYSTEM

Oil Pressure @ Idle Speed	10 (69)
@ Governed Speed	40-60 (276-414)
Maximum Oil Temperature	280 (138)
Oil Capacity with OP 9457 Oil Pan : Low - High	4.0-4.6 (15.1-17.4)
Total System Capacity (Including Filter)	5.0 (18.9)

GeneratorJoe®

GeneratorJoe®

4723 Muirfield Court
Santa Rosa, CA 95405

Phone: 707 542-2224

Fax: 707 542-2227

Email: sales@generatorjoe.net

Web: www.generatorjoe.net

Engine Application Data

G-DRIVE
QSB
4

FUEL SYSTEM

Type Injection System.....	Bosch HPCR	
Maximum Restriction at Lift Pump(clean/dirty filter)..... — in Hg (kPa)	5/10 (17/34)	
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head) — in Hg (kPa)	6 (20)	
Maximum Fuel Flow to Injector Pump — US gph (litre/hr)	28 (106)	
Maximum Return Fuel Flow — US gph (litre/hr)	27 (103)	
Maximum Fuel Inlet Temperature — °F (°C)	160 (71)	

ELECTRICAL SYSTEM

Cranking Motor (Heavy Duty, Positive Engagement)..... — volt	12	24
Battery Charging System, Negative Ground — ampere	100	70
Maximum Allowable Resistance of Cranking Circuit — ohm	0.001	0.002
Minimum Recommended Battery Capacity		
• Cold Soak @ 0 °F to 32 °F (-18 °C to 0 °C) — 0°F CCA	1100	(550)

COLD START CAPABILITY

Minimum Ambient Temperature for NFPA 110 Cold Start (90 degree F Coolant Temperature) — °F (°C)	40	(4)
Minimum Ambient Temperature for Unaided Cold Start..... — °F (°C)	10	(-12)

PERFORMANCE DATA

- All data is based on:
- Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.
 - Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.
 - ISO 3046, Part 1, Standard Reference Conditions of:

Barometric Pressure : 100 kPa (29.53 in Hg)	Air Temperature : 25 °C (77 °F)
Altitude : 110 m (361 ft)	Relative Humidity : 30%

Steady State Stability Band at Any Constant Load — %	+/-	0.25
Estimated Free Field Sound Pressure Level of a Typical Generator Set;		
Excludes Exhaust Noise; at Rated Load and 7.5 m (24.6 ft); @1800 rpm..... — dBA		88
Exhaust Noise at 1 m Horizontal from Centerline of Exhaust Pipe Outlet Upwards at 45 °..... — dBA		95.2

Governed Engine Speed..... rpm	
Engine Idle Speed..... rpm	
Gross Engine Power Output..... hp (kW)	
Brake Mean Effective Pressure..... psi (kPa)	
Piston Speed..... ft/min (m/s)	
Friction Horsepower..... hp (kW)	
Engine Water Flow at Stated Friction Head External to Engine:	
• 2.5 psi Friction Head..... US gpm (litre/s)	
• Maximum Friction Head..... US gpm (litre/s)	

	STANDBY POWER		PRIME POWER	
	60 hz	50 hz	60 hz	50 hz
	1800	1500	1800	1500
	700 - 900	700 - 900	700 - 900	700 - 900
Gross Engine Power Output.....	324 (242)	285 (213)	279 (208)	244 (182)
Brake Mean Effective Pressure.....	349 (2404)	368 (2537)	300 (2070)	315 (2172)
Piston Speed.....	1464 (7.4)	1220 (6.2)	1464 (7.4)	1220 (6.2)
Friction Horsepower.....	25 (19)	19 (14)	25 (19)	19 (14)
Engine Water Flow at Stated Friction Head External to Engine:				
• 2.5 psi Friction Head.....	38 (2.4)	32 (2.0)	38 (2.4)	32 (2.0)
• Maximum Friction Head.....	33 (2.1)	26 (1.6)	33 (2.1)	26 (1.6)
Intake Air Flow.....	569 (269)	448 (212)	541 (256)	434 (205)
Exhaust Gas Temperature.....	988 (532)	1041 (561)	907 (487)	1011 (544)
Exhaust Gas Flow.....	1549 (732)	1265 (597)	1342 (634)	1205 (569)
Air to Fuel Ratio.....	22.6:1	20.6:1	25.1:1	22.5:1
Radiated Heat to Ambient.....	1342 (24)	1163 (21)	1154 (21)	1032 (19)
Heat Rejection to Jacket Coolant.....	4858 (86)	4475 (79)	4231 (75)	3932 (70)
Heat Rejection to Exhaust.....	10734 (189)	9261 (163)	9078 (160)	8542 (151)
Heat Rejected to Fuel.....	52 (1)	44 (1)	39 (1)	32 (1)
Heat Rejected to Aftercooler.....	2786 (49)	2041 (36)	2499 (44)	1893 (34)
Charge Air Flow.....	42 (19)	33 (15)	39 (18)	32 (15)
Turbocharger Compressor Outlet Pressure.....	35 (239)	31 (214)	32 (219)	29 (199)
Turbocharger Compressor Outlet Temperature.....	399 (204)	379 (193)	376 (192)	363 (184)

Engine Data

Intake Air Flow.....	cfm (litre/s)	569 (269)	448 (212)	541 (256)	434 (205)
Exhaust Gas Temperature.....	°F (°C)	988 (532)	1041 (561)	907 (487)	1011 (544)
Exhaust Gas Flow.....	cfm (litre/s)	1549 (732)	1265 (597)	1342 (634)	1205 (569)
Air to Fuel Ratio.....	air : fuel	22.6:1	20.6:1	25.1:1	22.5:1
Radiated Heat to Ambient.....	BTU/min (kW)	1342 (24)	1163 (21)	1154 (21)	1032 (19)
Heat Rejection to Jacket Coolant.....	BTU/min (kW)	4858 (86)	4475 (79)	4231 (75)	3932 (70)
Heat Rejection to Exhaust.....	BTU/min (kW)	10734 (189)	9261 (163)	9078 (160)	8542 (151)
Heat Rejected to Fuel.....	BTU/min (kW)	52 (1)	44 (1)	39 (1)	32 (1)
Heat Rejected to Aftercooler.....	BTU/min (kW)	2786 (49)	2041 (36)	2499 (44)	1893 (34)
Charge Air Flow.....	lb/min (kg/min)	42 (19)	33 (15)	39 (18)	32 (15)
Turbocharger Compressor Outlet Pressure.....	psi (kPa)	35 (239)	31 (214)	32 (219)	29 (199)
Turbocharger Compressor Outlet Temperature.....	°F (°C)	399 (204)	379 (193)	376 (192)	363 (184)

N.A. - Not Available
N/A - Not Applicable to this Engine
TBD - To Be Determined

ENGINE MODEL : QSB7-G5 NR3
DATA SHEET : DS-92278
DATE : 12Dec07
CURVE NO. : FR-92278

Cummins Inc.

Columbus, Indiana 47202-3005

GeneratorJoe®

GeneratorJoe®

4723 Muirfield Court
Santa Rosa, CA 95405
Phone: 707 542-2224
Fax: 707 542-2227

Email: sales@generatorjoe.net
Web: www.generatorjoe.net

Generator Controller Options



Digital Control Panel

The DGC-2020 digital GenSet controller provides integrated engine-GenSet control, protection, and metering. Microprocessor based technology allows for exact measurement, set point adjustment, and timing functions. Front panel 3 position controls and indicators enable quick and simple operation. The panel is also equipped with a emergency stop push button and an Alarm Horn with silence button. A wide temperature-range liquid crystal display (LCD) with backlighting can be viewed under a wide range of ambient light and temperature conditions down to 104° F (40° C).

Features SAE J1939 Engine ECU communications, Multilingual capability, Remote RS-485 communications for Optional RDP-110 Remote Annunciator, Extremely rugged, fully encapsulated design with 4 programmable contact inputs and 10 contact outputs (2 ADC rated). It also features Modbus Communications with RS-485, Battery Backup for Real Time Clock, UL recognized, CSA certified, CE approved, HALT (Highly Accelerated Life Tests) tested, IP 54 Front Panel rating with integrated gasket, and NFPA 110Level 1 Compatible.



Analog Top Mount Controller

This Generator control panel has analog instruments to monitor AC voltage, AC frequency, percent of load and, run time/hour meter. Safety shutdowns provide red LED indication for overspeed, overcrank, low oil pressure, and high coolant temperature. Provide green LED indication of engine running. Control switch is provided for local and remote starting with 3 position run/off/remote switch.

There is also an engine mounted emergency by-pass key switch with mechanical oil pressure and coolant temperature gauge.



Analog End Mount Controller

This Generator control panel has analog instruments to monitor AC voltage, AC frequency, and percent of load. The analog engine instruments monitor oil pressure, water temperature, battery voltage, fuel level, and run time/hour meter. Safety shutdowns provide red LED indication for overspeed, overcrank, low oil pressure, and high coolant temperature. Provide green LED indication of engine running. Control switch is provided for local and remote starting with 3 position run/off/remote switch.

There is also an engine mounted emergency by-pass key switch.

AC Alternator Specifications

STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as B55000, VDE 0530, NEMA MG1-32, 1EC34, CSA C22.2-100, A51359.

Other standards and certifications can be considered on request.

VOLTAGE REGULATORS

MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

(Optional) MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance. Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A frilly connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

SHAFT

The generator rotor is dynamically balanced to better than B56861:Part 1 Grade 2.5 for minimum vibration in operation.

INSULATION/IMPREGNATION

The insulation system is class H.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

Standard Features and Optional Accessories

Standard Features

- Heavy duty steel base
- Vibration isolators
- Oil drain valve with extension
- Battery rack
- Battery cables
- Water jacket heater
- Owners manual
- Electronic Isochronous Governor


Optional Accessories

- Critical Exhaust Silencer
- Flex Exhaust Connector
- Top Mount Analog Control Panel
- End Mount Analog Control Panel
- DGC2020 Digital Control Panel
- Modem for DGC2020
- Enhanced Gen Protection for DGC2020
- Surface Mount Remote Annunciator Panel for DGC2020
- Flush Mount Remote Annunciator Panel for DGC2020
- Remote Mount Break Glass E-Stop Switch
- Line Circuit Breaker
- 3 phase sensing
- Generator strip heater
- Radiator duct flange for open unit
- Weather Enclosure with external muffler
- Weather Enclosure with internal muffler
- Sound Attenuated weather enclosure
- Oil Pan Heater
- Battery
- Battery Charger
- Battery Heaters
- Sub-Base Fuel Tank
- Flexible Fuel Lines
- Customize to Your Specifications

Weights and Dimensions

OVERALL SIZE, L x W x H, in.: 108 in. x 46 in. x 60 in.
WEIGHT (WET): 3,500 lbs.

Note: Dim and weights reflect standard open unit with no options

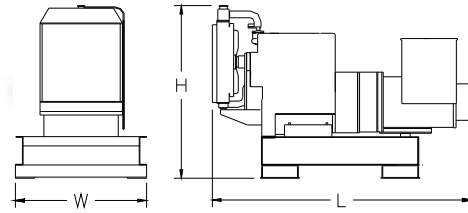

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.



GeneratorJoe®

GeneratorJoe®

4723 Muirfield Court
Santa Rosa, CA 95405
Phone: 707 542-2224
Fax: 707 542-2227

Email: sales@generatorjoe.net

Web: www.generatorjoe.net

A small business owned by service a connected disabled veteran.

Cage 1U5V7 - TIN/EIN #943026355 - Duns #054590203



Made in the USA!



Model: 200 CC & CC3

© Copyright, GeneratorJoe Inc. All Rights Reserved