



GeneratorJoe

Nobody gets the job done like GeneratorJoe!



Made In USA

3

CONTRACTOR / RENTAL GENERATORS

MODELS

LR55H, LR55V, 5500/4500 WATTS

LR55R, LR55RE* 5500/4500 WATTS

LR60H, 6000/5000 WATTS

GENERATOR TYPE TOTALLY BRUSHLESS
WITH CAPACITOR, COPPER WINDINGS
VOLTAGE PLUS™, <6% DISTORTION,
EXCLUSIVE SMOOTH WAVE™, CSA LISTED


FRAME SPECIFICATIONS:

NET DIMENSIONS (METRIC)

L	W	H
28(71)	22(56)	25(64)

PACKED DIMENSIONS

L	W	H	CUBIC FT
28.5(72)	22.5(57)	25.5(65)	9.5

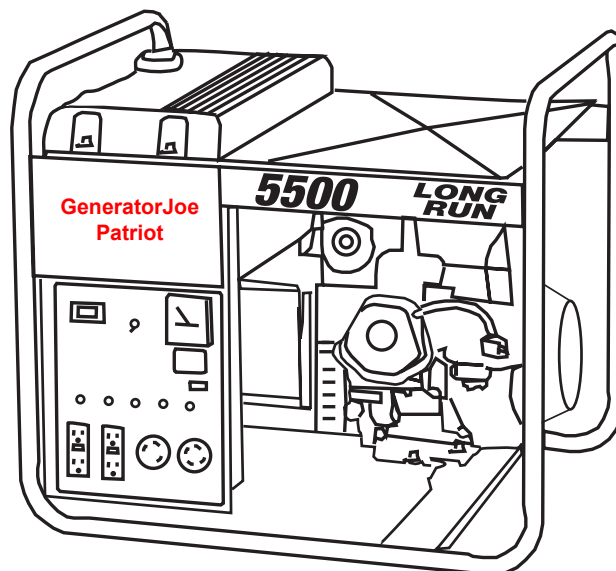

MODEL	WATTS		VOLTAGE	RATED AMPS		FREQ.	PHASE	RPM	ENGINE	WEIGHT	
	MAXIMUM SURGE	RATED CONTINUOUS		@120V	@240V					NET	PKD.
LR55H	5500	4500	120/240	37.5	18.8	60Hz	1	3600	9HP HONDA GX270	165	179
LR55V	5500	4500	120/240	37.5	18.8	60Hz	1	3600	9 HP VANGUARD 185400	170	184
LR55R	5500	4500	120/240	37.5	18.8	60Hz	1	3600	9HP ROBIN EX27	152	166
LR55RE	5500	4500	120/240	37.5	18.8	60Hz	1	3600	9HP ROBIN EX27	164	178
LR60H	6000	5000	120/240	41.6	20.8	60Hz	1	3600	11HP HONDA GX340	179	193

RECEPTACLES

2-20AMP, 120V, GFI NEMA, 5-20R (4 OUTLETS 2 DUPLEXES)

1-30 AMP, 120V, TWISTLOCK, NEMA L5-30R

1-20 AMP, 240V, TWISTLOCK, NEMA L14-20R

PLUGS REQUIRED FOR RECEPTACLES (NOT SUPPLIED)

5-15P OR 5-20P

L5-30P

L14-20P

CIRCUIT BREAKER PROTECTOR FOR EACH RECEPTACLE

STANDARD

VOLTMETER, HOUR METER (ELAPSED TIME), & EASY IDLE

STANDARD

FULL POWER SWITCH AT 120 VOLTS & 240 VOLTS

STANDARD

FUEL TANK 5 GALLONS

LR55H

LR55V

LR60H OR LR60HE

LR55R OR LR55RE

RUN TIME 1/2 LOAD

10.8 HOURS

8.3 HOURS

10.4 HOURS

10.9 HOURS

RUN TIME FULL LOAD

8.3 HOURS

5.7 HOURS

7.6 HOURS

7.6 HOURS

ENGINE & DECIBELS (AVERAGE VALUES)	DBA	MODELS	ALL ENGINES FEATURE SOLID STATE IGNITION AND RECOIL STARTERS	CAST IRON CYLINDER LINER
	74	LR55H	AT 7 METERS 9 HP HONDA, OHV, RECOIL START, LOW OIL SHUT DOWN	270 CC
	73	LR55V	AT 7 METERS 9 HP VANGUARD, OHV, RECOIL START, LOW OIL SHUT DOWN	296 CC
	69	LR55R	AT 7 METERS 9 HP SUBARU ROBIN, OHC, RECOIL START, LOW OIL SHUT DOWN	265 CC
	69	LR55RE	AT 7 METERS 9 HP SUBARU ROBIN, OHC, ELECTRIC RECOIL START, LOW OIL SHUT DOWN	265 CC
	75	LR60H	AT 7 METERS 11 HP HONDA, OHV, RECOIL START, LOW OIL SHUT DOWN	337 CC

FRAME 1" WELDED STEEL ROLL CAGE FRAME WITH ISOLATED RECESSED CONTROL PANEL

CHANGES: ALL SPECIFICATIONS AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AND THERE IS NO OBLIGATION TO MAKE CHANGES IN UNITS PREVIOUSLY SOLD. **RATINGS:** APPLY TO ALTITUDES UP TO 1000 FEET, STANDARD COOLING, NORMAL AMBIENTS AND GASOLINE FUEL.

REDUCE RATINGS 3-1/2% FOR EACH 1000 FEET ABOVE SEA LEVEL AND 1% FOR EACH 10° FAHRENHEIT RISE ABOVE 60° FAHRENHEIT.

CONNECTION OF A GENERATOR TO A HOME OR BUILDING REQUIRES A TRANSFER SWITCH. CONSULT A QUALIFIED ELECTRICIAN.

*Electric start models are shipped less battery. Required battery 300 cold cranking Amps, 5" Maximum width. TYPE U1.

GeneratorJoe - www.generatorjoe.net

4016 Quartz Drive, Santa Rosa, CA 95045 USA - Telephone (707) 539-9003 - Email: sales@generatorjoe.net
(A small business owned by a disabled veteran) - All products are proudly Made in the U.S.A.