



GeneratorJoe

Nobody gets the job done like GeneratorJoe!



Made In USA

5

CONTRACTOR / RENTAL GENERATORS

MODELS

LR105EI* 10000/9500 WATTS

LR105EHI* 10000/9500 WATTS

GENERATOR TYPE TOTALLY BRUSHLESS
WITH CAPACITOR, COPPER WINDINGS
VOLTAGE PLUS™ <6% DISTORTION,
EXCLUSIVE SMOOTH WAVE™, CSA LISTED


FRAME SPECIFICATIONS:

NET DIMENSIONS (METRIC)

MODEL	L	W	H	WEIGHT
LR105EI	30(76)	24(61)	25(64)	234(106)
LR105EHI	30(76)	24(61)	25(64)	253(115)

PACKED DIMENSIONS

MODEL	L	W	H	WEIGHT	CUBIC FT
LR105EI	31(79)	25(64)	26(66)	245(111)	11.7
LR105EHI	31(79)	25(64)	26(66)	264(120)	11.7

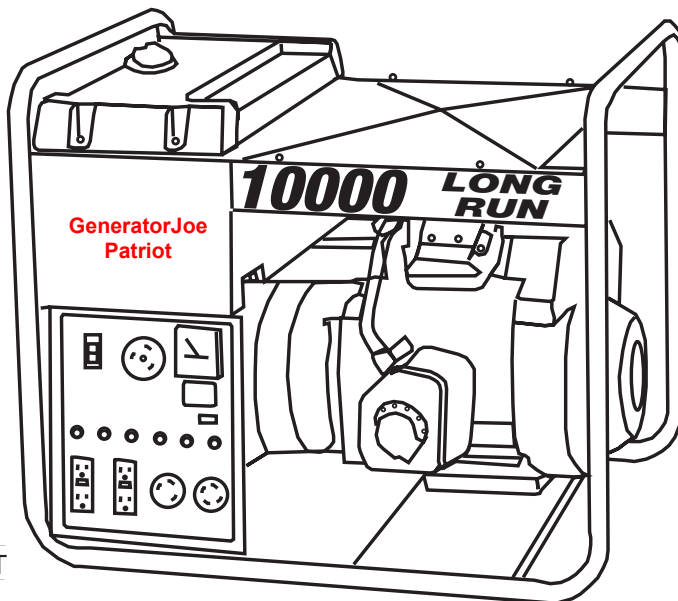

MODEL	WATTS		VOLTAGE	RATED AMPS		FREQUENCY	PHASE	RPM	ENGINE
	MAXIMUM SURGE	RATED CONTINUOUS		@120V	@240V				
LR105EI	10000	9500	120/240	79.2	39.6	60Hz	1	3600	18HP VANGUARD350400
LR105EHI	10000	9500	120/240	79.2	39.6	60Hz	1	3600	20HP HONDA GX620

RECEPTACLES

2-20AMP, 120V, GFI NEMA, 5-20R, STRAIGHT BLADE WITH (4 OUTLETS 2 DUPLEXES)

1-30 AMP, 120V, TWISTLOCK, NEMA L5-30R (1OUTLET)

1-30 AMP, 240V, TWISTLOCK, NEMA L14-30R (1OUTLET)

1-50 AMP, 240V, TWISTLOCK, CS6369

PLUGS REQUIRED FOR RECEPTACLES (NOT SUPPLIED)

5-15P OR 5-20P

L5-30P

L14-30P

CS6365C (1 -SUPPLIED WITH UNIT)

CIRCUIT BREAKER PROTECTOR FOR EACH RECEPTACLE STANDARD

VOLTMETER, HOUR METER (ELAPSED TIME) STANDARD

EASY IDLE STANDARD

FUEL TANK 8 GALLONS APPROXIMATE

LR105EI

LR105EHI

RUN TIME 1/2 LOAD

9 HOURS

8.5 HOURS

RUN TIME FULL LOAD

6.0 HOURS

5.8 HOURS

ENGINE & DECIBELS (AVERAGE VALUES)	DBA	MODELS	ALL ENGINES FEATURE SOLID STATE IGNITION	CAST IRON CYLINDER LINER
	76.5	LR105EI	AT 7 METERS 18 HP VANGUARD, OHV, LOW OIL SHUT DOWN, ELECTRIC START* WITH AUXILIARY RECOIL STARTER, SUPER LOW TONE MUFLER	570 CC
	76	LR105EHI	AT 7 METERS 20 HP HONDA, OHV, TWIN CYLINDERS, LOW OIL SHUT DOWN ELECTRIC START*, SUPER LOW TONE MUFLER	614 CC

FRAME 1" WELDED STEEL ROLL CAGE FRAME WITH ISOLATED RECESSED CONTROL PANEL

CHANGES: ALL SPECIFICATIONS AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AND THERE IS NO OBLIGATION TO MAKE CHANGES IN UNITS PREVIOUSLY SOLD. **RATINGS:** APPLY TO ALTITUDES UP TO 1000 FEET, STANDARD COOLING, NORMAL AMBIENTS AND GASOLINE FUEL.

REDUCE RATINGS 3-1/2% FOR EACH 1000 FEET ABOVE SEA LEVEL AND 1% FOR EACH 10° FAHRENHEIT RISE ABOVE 60° FAHRENHEIT.

CONNECTION OF A GENERATOR TO A HOME OR BUILDING REQUIRES A TRANSFER SWITCH. CONSULT A QUALIFIED ELECTRICIAN.

*Electric start models are shipped less battery. Required battery 300 cold cranking Amps, 5" Maximum width. TYPE U1.

GeneratorJoe - www.generatorjoe.net

4016 Quartz Drive, Santa Rosa, CA 95045 USA - Telephone (707) 539-9003 - Email: sales@generatorjoe.net

(A small business owned by a disabled veteran) - All products are proudly Made in the U.S.A.