



GeneratorJoe

Nobody gets the job done like GeneratorJoe!



Made In USA

CONTRACTOR / RENTAL DIESEL GENERATORS

MODELS

LR50EL* 5000/4000 WATTS

LR60EL* 6000/5000 WATTS

LR130EL* 13000/12000 WATTS

GENERATOR TYPE TOTALLY BRUSHLESS
WITH CAPACITOR, COPPER WINDINGS
VOLTAGE PLUS™ <6% DISTORTION,
EXCLUSIVE SMOOTH WAVE™


FRAME SPECIFICATIONS:

NET DIMENSIONS (METRIC)


MODEL	L	W	H	WEIGHT
LR50EL	28(71)	22(56)	25(64)	182(83)
LR60EL	28(71)	22(56)	25(64)	187(85)
LR130EL	39(99)	26(66)	29.5(75)	380(173)

PACKED DIMENSIONS

MODEL	L	W	H	WEIGHT	CUBIC FT
LR50EL	28.5(72)	22.5(57)	25.5(65)	196(89)	11.7
LR60EL	28.5(72)	22.5(57)	25.5(65)	201(91)	11.7
LR130EL	42(107)	40(102)	34.5(88)	420(190)	33.5



LR50EL
LR60EL

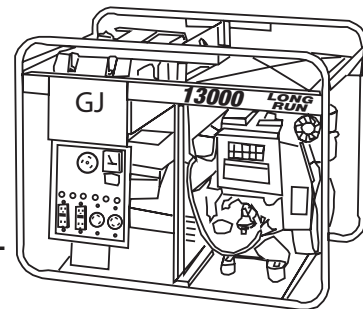

LR130EL

MODEL	WATTS		VOLTAGE	RATED AMPS		12VOLTS DC AMPS	FREQ.	PHASE	RPM	ENGINE
	MAXIMUM SURGE	RATED CONTINUOUS		@120V	@240V					
LR50EL	5500	4000	120/240	33.3	16.7	10	60Hz	1	3600	15LD350 LOMBARDINI
LR60EL	6000	5000	120/240	41.6	20.8	10	60Hz	1	3600	15LD400 LOMBARDINI
LR130EL	13000	12000	120/240	100	50	—	60Hz	1	3600	25LD425 LOMBARDINI

RECEPTACLES	LR50EL	LR60EL	LR130EL	PLUGS REQUIRED (NOT SUPPLIED)
20 AMP, 120V, GFI NEMA, 5-20R, STRAIGHT BLADE (4outlets)	2	2	2	5-15P OR 5-20P
30 AMP, 120V, TWISTLOCK, NEMA L5-30R	1	1	1	L5-30P
30 AMP, 240V, TWISTLOCK, NEMA L14-30R	—	—	1	L14-30P
20 AMP, 240V TWISTLOCK, NEMA L14-20R	1	1	—	L14-20P
50 AMP, 240V, TWISTLOCK, CS6369	—	—	1	CS6365C(1 SUPPLIED WITH UNIT)
12 VDC BATTERY CABLES	STD	STD	—	

CIRCUIT BREAKER PROTECTOR FOR EACH RECEPTACLE STANDARD

VOLTMETER, HOUR METER (ELAPSED TIME) STANDARD

(FULL POWER SWITCH AT 120 VOLTS AND 240 VOLTS MODELS LR50EL & LR60EL)

FUEL TANK	LR50EL 5 GALLONS	LR60EL 5 GALLONS	LR130EL 8 GALLONS APPROXIMATE
RUN TIME 1/2 LOAD	14.0 HOURS	14.0 HOURS	9.6 HOURS
RUN TIME FULL LOAD	10.5 HOURS	10.5 HOURS	8 HOURS

ENGINE & DECIBELS (AVERAGE VALUES)	DBA	MODELS	ALL ENGINES FEATURE ELECTRIC START* FUEL INJECTED & PRESSURE LUBRICATION	CAST IRON CYLINDER LINER
	77	LR50EL	AT 7 METERS 10 HP LOMBARDINI, 15LD400	400CC
	77	LR60EL	AT 7 METERS 10 HP LOMBARDINI, 15LD400	400CC
	81	LR130EL	AT 7 METERS 19 HP LOMBARDINI 25LD425	654CC

FRAME 1" WELDED STEEL ROLL CAGE FRAME WITH ISOLATED RECESSED CONTROL PANEL WITH HEAVY DUTY VIBRATION ISOLATORS (LIFTING HOOK STANDARD ON MODEL LR130EL)

CHANGES: ALL SPECIFICATIONS AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AND THERE IS NO OBLIGATION TO MAKE CHANGES IN UNITS PREVIOUSLY SOLD.
RATINGS: APPLY TO ALTITUDES UP TO 1000 FEET, STANDARD COOLING, NORMAL AMBIENTS AND GASOLINE FUEL. REDUCE RATINGS 3-1/2% FOR EACH 1000 FEET ABOVE SEA LEVEL AND 1% FOR EACH 10° FAHRENHEIT RISE ABOVE 60° FAHRENHEIT.CONNECTION OF A GENERATOR TO A HOME OR BUILDING REQUIRES A TRANSFER SWITCH.
CONSULT A QUALIFIED ELECTRICIAN. *Electric start models are shipped less battery. Required battery 400 cold cranking Amps. 24 BCI. Optional cold weather glow plug kit available. Consult factory.

GeneratorJoe - www.generatorjoe.net

4016 Quartz Drive, Santa Rosa, CA 95045 USA - Telephone (707) 539-9003 - Email: sales@generatorjoe.net

(A small business owned by a disabled veteran) - All products are proudly Made in the U.S.A.