



MODEL ITS-50R TRANSFER SWITCH


MAXIMUM SERVICE
120/240V 60Hz 1 Phase
50 A/Pole 4 Pole
TIME DELAY 20-30 Seconds
GENERAL LOADS

CHASSIS GROUND	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN
	GENERATOR				POWERCORD				PANEL			

TIGHTEN SCREWS TO 45 INCH POUNDS

ELECTRICAL CONNECTIONS

TYPICAL
GENERATOR/
POWERCORD

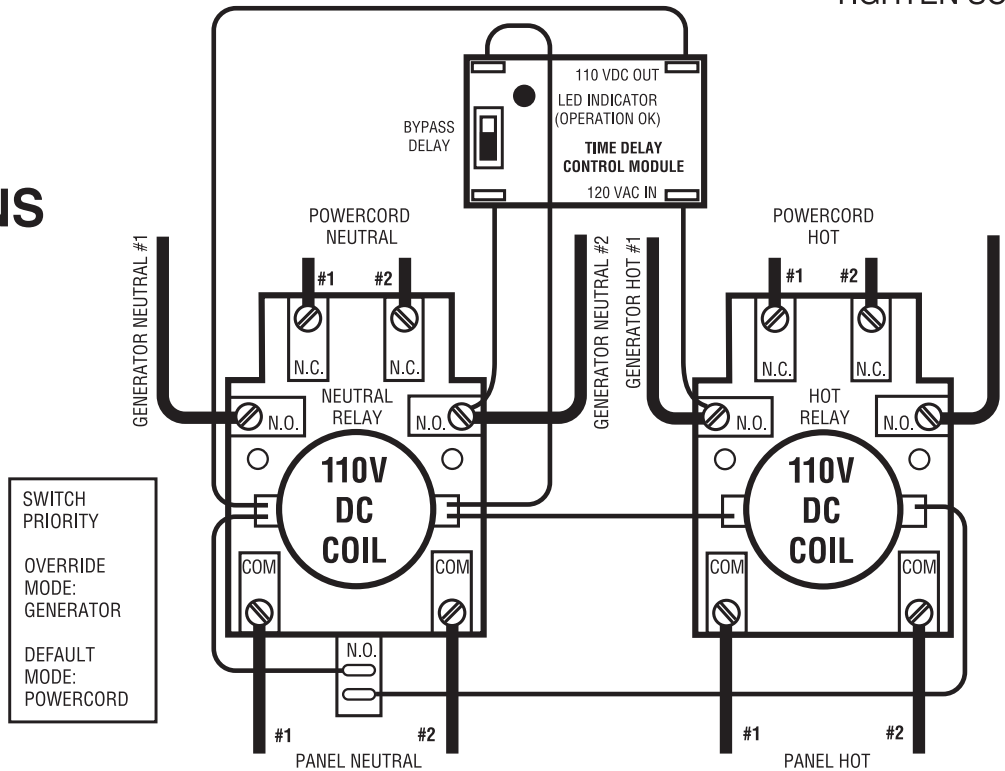

SWITCH
PRIORITY

OVERRIDE
MODE:
GENERATOR

DEFAULT
MODE:
POWERCORD

WARNING

MULTIPLE 120/240 VOLT POWER SOURCES. ALL MUST BE SECURED OFF BEFORE SERVICING. REFER SERVICE TO A QUALIFIED ELECTRICIAN.

NOTE

120/240 VOLT TRANSFER SWITCHES MAY NOT OPERATE IF POWER IS LOST ON ONE HOT LEG WHEN RUNNING ON 240 VOLTS.

Use copper wire only
75° C. minimum.



GeneratorJoe

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax: 707 539-5212
Email: sales@generatorjoe.NET
Web www.generatorjoe.NET