



GeneratorJoe

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax: 707 539-5212
Email: sales@generatorjoe.NET
Web www.generatorjoe.NET



TEREX®

Gen-Pac Generator T25G

Gen-Pac Generator



GEN-PAC GENERATOR T25G

STANDARD FEATURES

- Versatile solution for your worksite power needs
- Rental ready mobile generator package
- Heavy duty 4 cycle diesel engine
- User friendly control panel

Specifications

System Rating at 60 Hz	
Prime	20 kW / 25 kVA
Standby	22 kW / 28 kVA
System Power Output at Prime	
Available 3 phase voltage	208 / 220 / 240 / 440 / 480
Associated 3 phase amps (0.8 power factor)	69 / 66 / 60 / 33 / 30
1 phase power	16 kW
1 phase kVA	16 kVA
Available 1 phase voltage	120 / 240
Associated 1 phase amps (1.0 power factor)	134 / 67
Max amp rating (main breaker size)	70 A



GeneratorJoe

4016 Quartz Drive
 Santa Rosa, CA 95405
 Phone: 707 539-9003
 Fax: 707 539-5212
 Email: sales@generatorjoe.NET
 Web www.generatorjoe.NET

Specifications


Engine		T25G
Manufacturer	Isuzu	
Model	4LE1PV02	
Horsepower - prime (1,800 rpm)	31.4 hp (23.4 kWm)	
Description	4 cylinder, 4-cycle, water cooled, OHV, in-line, direct injection	
Bore & stroke	3.35 x 3.78 in (85 x 96 mm)	
Piston displacement	134 in ³ (2.2 L)	
Compression ratio	21.5 : 1	
Monitoring gauges	battery voltage, hours	
Coolant capacity - engine only	3 qts (2.8 L)	
Cooling system	liquid cooled - rated to 105° F ambient	

Fuel System		
Specification	#2 diesel	
Filter	fuel / water separator	
Capacity	30 gal (114 L)	
Tank	polypropylene	
Consumption and run time	Full load	1.5 gal/hr (5.7 L/hr) 20 hr
	3/4 load	1.1 gal/hr (4.2 L/hr) 27 hr
	Half load	0.8 gal/hr (3.0 L/hr) 38 hr

System Controls and Distribution	
Engine governor	mechanical (+/- 2%)
Protection (safety shutdowns)	low oil pressure, high water temperature
Generator gauges	voltmeter, ammeter, dial type Hz meter
Receptacles, 120 V	2 Each 20 Amp GFCI Duplex
Receptacles, 240 V	2 Each 50 Amp Tempower T/L
Primary Distribution	4 lug terminals with mainline circuit breaker

Generator	
Manufacturer	Newage
Rating (0.8 power factor)	24 kW 3 Phase @ 480 / 240 V
Description	brushless, 4 pole, synchronous, single bearing
Insulation	Class H
Temperature rating	125° C rise over 40° C ambient
Automatic voltage regulator	external, solid state, adjustable
Voltage regulation	+/- 1%
Frequency (speed)	60 Hertz (1,800 RPM)

Packaging		
Enclosure	lockable doors	
Lifting system	roof mounted, dual point	
Weight (with trailer)	empty	1,654 lbs (750 kg)
	full	1,871 lbs (850 kg)
Dimensions - L x W x H	120 x 62 x 54 in (305 x 158 x 137 cm)	

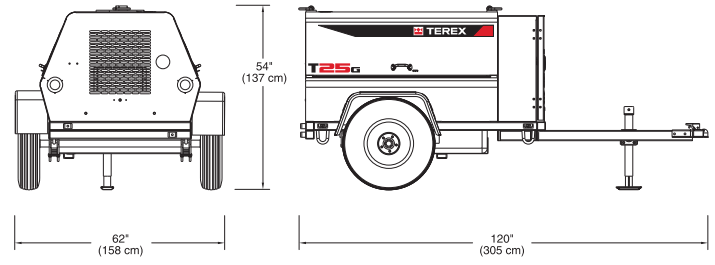

GeneratorJoe

For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local Genie distributor.

4016 Quartz Drive
 Santa Rosa, CA 95405
 Phone: 707 539-9003
 Fax: 707 539-5212
 Email: sales@generatorjoe.NET
 Web www.generatorjoe.NET

Effective Date: January, 2008. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the U.S.A. and many other countries. Genie® is a registered trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. © 2008 Terex Corporation.