



ZTG and ZTGD Model, Dimensions and Weight									
Model	Ampere Rating	Poles	NEMA 1			Ref. Figure	Weight		Application Notes
			Height (A)	Width (B)	Depth (C)		Open Type	NEMA 1	
ZTG	40, 80	2, 3	24 (61)	18 (46)	11 (28)	A	21 (10)	57 (26)	1 - 6
		4					21 (10)	60 (27)	
	100, 150	2, 3	24 (61)	18 (46)	11 (28)	A	21 (10)	57 (26)	1 - 6
		4					21 (10)	60 (27)	
	200, 225	2, 3	24 (61)	18 (46)	11 (28)	A	21 (10)	57 (26)	1 - 6
		4					21 (10)	60 (27)	
	260, 400	2, 3	46 (117)	24 (61)	14 (36)	A	70 (32)	175 (80)	1 - 5
		4					75 (34)	180 (82)	
600	2, 3	66 (168)	24 (61)	19.5 (50)	B	165 (75)	400 (450)	1 - 5, 7	
	4					185 (84)	450 (204)		
800, 1000, 1200	2, 3	74 (188)	40 (102)	19.5 (50)	B	190 (86)	455 (206)	1 - 5, 7	
	4					210 (95)	540 (245)		
1600, 2000	3	90 (229)	35.5 (90)	48 (122)	C	345 (156)	1010 (458)	1 - 5, 7-8	
	4					450 (204)	1160 (526)		
3000	3	90 (229)	35.5 (90)	48 (122)	C	465 (211)	1010 (458)	1 - 5, 7-8	
	4					670 (304)	1160 (526)		
ZTGD	40, 80	2, 3	46 (117)	24 (61)	14 (36)	A	21 (10)	57 (26)	1 - 6
		4					21 (10)	60 (27)	
	100, 150	2, 3	46 (117)	24 (61)	14 (36)	A	21 (10)	57 (26)	1 - 6
		4					21 (10)	60 (27)	
	200, 225	2, 3	46 (117)	24 (61)	14 (36)	A	21 (10)	57 (26)	1 - 6
		4					21 (10)	60 (27)	
	260, 400	2, 3	46 (117)	24 (61)	14 (36)	A	80 (36)	220 (100)	1 - 5
		4					85 (39)	230 (102)	
600	2, 3	66 (168)	24 (61)	19.5 (50)	B	185 (84)	400 (181)	1 - 5, 7	
	4					205 (93)	450 (204)		
800, 1000, 1200	2, 3	74 (188)	40 (102)	19.5 (50)	B	210 (95)	475 (215)	1 - 5, 7	
	4					230 (104)	560 (254)		
1600, 2000	3	90 (229)	35.5 (90)	48 (122)	C	365 (166)	1010 (458)	1 - 5, 7-8	
	4					470 (204)	1160 (526)		
3000	3	90 (229)	35.5 (90)	48 (122)	C	485 (220)	1130 (513)	1 - 5, 7-8	
	4					690 (313)	1395 (633)		

Application Notes:

- Metric dimensions (cm) and weights (kg) shown in parentheses adjacent to English measurements.
- Includes 1.25" door projection beyond base depth. Allow a minimum of 3" additional depth for projection of handle, lights, switches, pushbuttons, etc.
- All dimensions and weights are approximate and subject to change without notice.
- Packing materials must be added to weights shown. Allow 15% additional weight for cartons, skids, crates, etc.
- Special enclosure (NEMA 3R, 4, 4X, 12, etc.) dimensions and layouts may differ. Consult factory for details.
- A ZTG(D) 40-225A, when ordered with the following options, will require a larger enclosure of 46"x 24"x 14.13" (HxWxD): A62(T), Digital Meter, HT, OCVR-1SG, OCVR-1SS.
- Add 3" in height for removable lifting eyes.
- Ventilation louvers on side and rear of enclosure at 1600-3000 amps. One set of louvers must be clear for airflow with standard cable connections.

Reference Figures

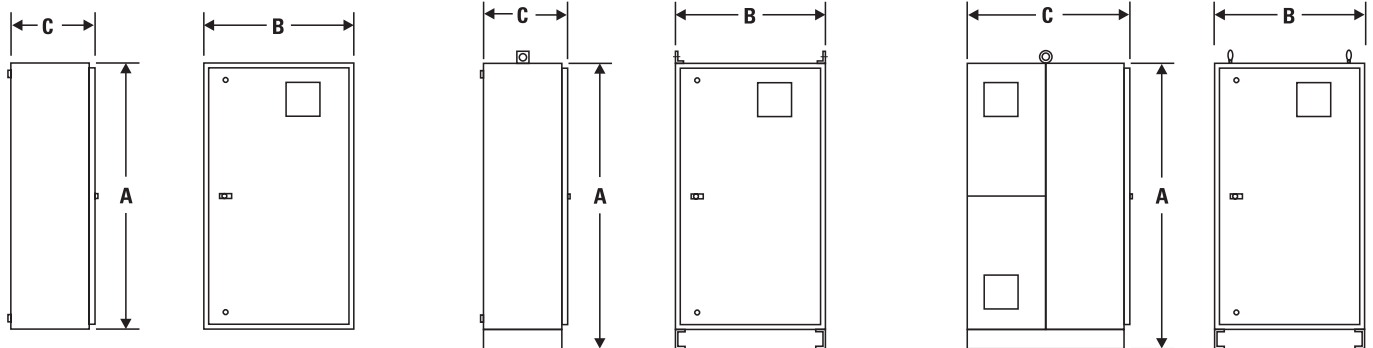


Figure A

Figure B

Figure C