



GeneratorJoe®



Made in the USA!

Centurion MT Series Model: 800 MT-3



Features

- Single source responsibility for the generator set and accessories.
- Prototype and production tested to insure one step load acceptance per NFPA 110.
- Two year limited warranty on generator sets and accessories.
- Unit conforms to NEMA, UL, ANSI and other standards.
- Heavy duty 4 cycle industrial engine for reliability and fuel efficiency.
- Brushless rotating field generator with class H insulation.
- Heavy duty steel base with integral vibration isolators.
- Electronic Isochronous Governor.
- EPA Emissions Certified
- Aluminum powder coated housing.
- Deep Sea 7420 controller.
- ABB breakers.
- Extended oil/radiator drains.
- UL 2200 available.

Ratings Diesel

Single and/or Three Phase Available

		60Hz	50 Hz
Standby:	kW	800	664
	kVA	1015	842
Prime:	kW	674	560
	kVA	856	710

Generator	Voltage	PH	Hz	Standby Rating		Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
Newage	277/480	3	60	800 / 675	1666	674 / 856	1405
	139/240	3	60	800 / 675	3332	674 / 856	2810
	254/440	3	60	800 / 675	1818	674 / 856	1533
	127/220	3	60	800 / 675	3635	674 / 856	3065
	240/416	3	60	800 / 675	1922	674 / 856	1621
	120/208	3	60	800 / 675	3845	674 / 856	3242
	120/240	3	60	800 / 675	3332	674 / 856	2810
	219/380	3	60	800 / 675	2105	674 / 856	1774
	120/240	1	60	800 / 800	3332	674 / 674	2810

- 24 Amp Battery Charging Alternator
- Hi-temp radiator
- Jacket water pump
- Pusher fan and guard
- Shut-down sensors for low oil pressure, high coolant temp., low coolant level, high ambient temp.
- Open coolant recovery system with 50/50 water to anti-freeze mixture

RATINGS: All single phase gen-sets are dedicated 4 lead windings, rated at unity (1.0) power factor. All three phase gen-sets are 12 lead windings, rated at .8 power factor. 130°C "STANDBY RATINGS" are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based on 130°C (standby) R/R winding temperature, within a maximum 40°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.. GENERAL GUIDELINES FOR DERATION: Altitude: Derate 0.5% per 100m (328 ft.) elevation above 1000m (3279 ft.) Temperature: Derate 1.0% per 10°C (18°F) temperature above 40°C (104°F).

Engine Application Data

ENGINE

Manufacturer Marathon Electric Generators
 Model & Type 572RSL4033 4 Pole, 12 Lead, Three Phase
 573RSS4274 4 Pole, 4 Lead, 600V, Three Phase
 Exciter Brushless, PMG excited
 Voltage Regulator Solid State, HZ/Volts
 Voltage Regulation ½%, No load to full load
 Frequency Field convertible, 60 HZ to 50 HZ
 Frequency Regulation ± ½% (1/2 cycle, no load to full load)
 Unbalanced Load Capability 100% of standby amps
 One Step Load Acceptance 100% of nameplate rating
 Total Stator and Load Insulation Class H, 180°C
 Temperature Rise 130°C R/R, standby rating @ 40°C amb.
 3 Ø Motor Starting @ 30% Voltage Dip (208-240V) 1200 kVA
 3 Ø Motor Starting @ 30% Voltage Dip (480V-600V) 1430 kVA
 Bearing 1, Pre-lubed and sealed
 Coupling Direct flexible disc.
 Total Harmonic Distortion Max 3½% (MIL-STD705B)
 Telephone Interference Factor Max 50 (NEMA MG1-22)
 Deviation Factor Max 5% (MIL-STD 405B)
 Alternator Self ventilating and drip-proof
 Ltd. Warranty Period 24 Months from start-up date or
 1000 hours use, first to occur.

FUEL SYSTEM

Type Diesel Fuel Oil (ASTM No. 2-D)
 Combustion System Direct Injection
 Fuel Injection Pump Electronic, MTU X57507300005
 12 VDC Glo-Plugs Optional Equipment
 Fuel Filter Yes

FUEL CONSUMPTION

GAL/HR (LITER/HR)	STANDBY
100% LOAD	50.9 (192.7)
75% LOAD	38.3 (145.0)
50% LOAD	26.0 (98.4)

OIL SYSTEM

Type Full Pressure
 Oil Pan Capacity qt. (L) 70.80 (67.0)
 Oil Pan Cap. W/ filter qt. (L) 81.36 (77.0)
 Oil Filter 4, Replaceable Cartridge Type

ELECTRICAL SYSTEM

Ignition System Electronic
 Eng. Alternator and Starter:
 Ground Negative
 Volts DC 24
 Recommended battery to -18°C (0°F): (2) 12 VDC, BCI#31,
 Max. Dimensions: 14"lg x 6 3/4" wi x 10" hi, with standard round
 posts. Min output 1000 CCA. Battery tray (max. dim. at 15"lg x
 7"wi). This model has (2) battery trays, (2) hold down straps, (2)
 sets of battery cables, and (1) battery charger. Installation of (2)
 12VDC starting batteries connected in series for 24VDC output is
 required, with possible higher AMP/HR rating, as described
 above, if the normal environment temperature averages -13° F (-
 25°C) or cooler.

COOLING SYSTEM

Type of System Air to Air, Charged Air Cooler
 Coolant Pump Pre-lubricated, self-sealing
 Cooling Fan Type (no. of blades) Pusher (24)
 Fan Diameter inches (cm) 33.5 (85)
 Ambient Capacity of Radiator °F (°C) 122 (50)
 Engine Jacket Coolant Capacity gal. (L) 29.1 (110)
 Radiator Coolant Capacity gal. (L) 72.4 (274)
 Water Pump Capacity gpm (L/min) 220 (833)
 Heat Reject Coolant: Btu/mi 15,354
 Air to Air Heat Reject, BTU/min. 4,345
 Low Radiator Coolant Level Shutdown Standard
 Note: Coolant temp. shut-down switch setting at 228°F (109°C)
 with 50/50 (water/antifreeze) mix.

COOLING AIR REQUIREMENTS

Combustion Air, cfm (m³/min) 1907 (54.0)
 Max. Air Intake Restrictions:
 Clean Air Cleaner, KPA (MBAR) 2 (20)
 Max. Temp. out of Charged Air Cooler.:
 @ 77°F (25°C) Amb. Air, °F (°C) 180 (82)
 Radiator Cooling Air, SCFM (m³/min) 26,700 (756)

EXHAUST SYSTEM

Exhaust Outlet Size (2) 6"
 Max. Back Pressure in KPA (in. H2O) 8.5 (34.1)
 Exhaust Flow, at rated KW, CFM (m³/min) 5,615 (159)
 Exhaust Temp, (Stack) °F (°C) 1,022 (550)



GeneratorJoe®

4723 Muirfield Court
 Santa Rosa, CA 95405
 Phone: 707 542-2224
 Fax: 707 542-2227

Email: sales@generatorjoe.net
 Web: www.generatorjoe.net

GeneratorJoe®

AC Alternator Specifications

STANDARDS: Marathon MagnaPlus and MagnaMax generators meet UL Listed Electric Generator, American and other international standards such as: NEMA MG1-22, BS5000, CAS C22.2, IEC 34-1 AND VDE 0530. Other standards and certifications can be considered upon request. (Both MagnaPlus & MagnaMax series are built with NEMA Class H Insulation materials or better which are normally rated at 190C degrees total temperature by NEMA however UL laboratories demands the total temperature be derated to a maximum of 160C total temperature when "UL LISTED").

VOLTAGE REGULATOR: SE350, supplied with standard MagnaPlus units and excitation system have solid state voltage build-up, encapsulated for humidity and abrasion protection, 1% regulation, volts per hertz operation, over excitation shutdown, stability adjust and built-in voltage adjustment.

PM300 (optional on MagnaPlus) Supplied with optional PMG excitation support have solid state voltage build-up, encapsulated for humidity and abrasion protection, 1% regulation, volts per hertz operation, over excitation shutdown, stability adjust and built-in voltage adjustment.

DVR2000E+ (optional for MagnaPlus) Standard on MagnaMax voltage regulator and PMG excitation support system are digital, microprocessor design with solid state voltage build-up, encapsulated for humidity and abrasion protection, 1/4% regulation, true volts per hertz operation with adjustable cut in, loss of sensing continuity shutdown, over excitation shutdown, 3 phase RMS sensing, over voltage protection, and provisions for parallel operation.

PMG Excitation Support System (Standard on MagnaMax) Optional for MagnaPlus, permanent magnet generator excitation support system, minimum short circuit support current of 300% of the rating (250% for 50 hertz) for 10 seconds.

INSULATION SYSTEM: Meet UL1446, UL2200 requirements. Class H materials or better.

MAIN ROTOR: MagnaPlus main rotating field construction shall consist of one piece, four pole laminations, incorporate amortisseur windings to facilitate parallel operation and application to voltage distorting loads. In addition, the amortisseur winding and field pole coil supports may be integrally die cast with the rotor laminations to form a unitized rotor core. The rotating assembly shall be dynamically balanced to less than 2 mils -peak-to-peak-displacement, and shall be designed to have an over speed withstand of 125% of rated speed for 15 minutes when operating at stable rated operating temperature.

VERIFICATION OF PERFORMANCE: (MagnaPlus series) All certified performance and temperature rise test data submitted by generator manufacturer are to be the result of the actual test of the same or duplicate generators. Temperature rise data shall be the result of loaded, rated power factor heat runs at the rated voltage and hertz. All performance testing shall be done in accordance with MIL-STD-705 and/or IEEE Standard-115. Generators are manufactured using production procedures & quality assurance to ISO9001:2008.

Deep Sea 7420 Digital Controller



The 7420 controller is an auto start mains (utility) failure module for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

The 7420 controller will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. It also includes: (11) configurable inputs alerts • (8) configurable outputs alerts • voltage monitoring • mains (utility) failure detection • (250) event logs • configurable timers • automatic shutdown or warning during fault detection • remote start (on load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button • power monitoring (kWh, kVAR, kVAh, kVArh)

This controller includes the 7420 expansion features including RS232, RS484 (using MODBUS-RTU/TCP), direct USB connection with PC, expansion optioned using DSENet for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.



Further expansion is available by adding the optional "WebNet" gateway interface module. This device will allow comprehensive monitoring of the generator via the cloud including identification, location, and status. Some advantages of this module include: reduced site visits and maintenance costs • remote fuel management • fault analysis • asset tracking • automatic system alerts • maximized system up-time.

GeneratorJoe®

4723 Muirfield Court
Santa Rosa, CA 95405
Phone: 707 542-2224
Fax: 707 542-2227

Email: sales@generatorjoe.net
Web: www.generatorjoe.net

Standard Features and Optional Accessories

Standard Features

- Heavy duty steel base
- Vibration isolators
- Oil/radiator drain valve with extension
- Battery charger
- Battery cables/rack
- Circuit breaker
- Electronic Isochronous Governor
- Owners manual


Optional Accessories

- PMG
- PMG with DVR regulator
- Block heater
- Battery heater
- Battery charger upgrades (10-20 amp)
- E-stop
- Enclosure lights
- Dual fuel
- WebNet gateway (remote monitoring)
- NFPA 110 compliance package
- 3 phase sensing
- Generator strip heater
- 8 Lamp Annunciator panel
- Weather enclosure with internal muffler
- Hospital grade silencers
- Oil pan heater
- Flexible fuel lines
- Customize to your specifications

Weights and Dimensions

Overall Size, L x W x H, in.: 168 in. x 82 in. x 94 in.
Weight (Wet): 12,300 lbs.

Note: Dim and weights reflect standard open unit with no options

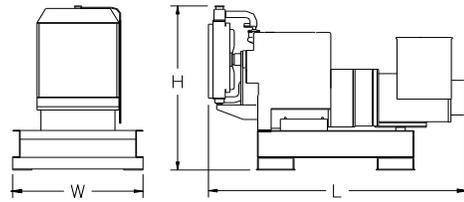

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.



GeneratorJoe®

GeneratorJoe®

4723 Muirfield Court

Santa Rosa, CA 95405

Phone: 707 542-2224


Fax: 707 542-2227

Email: sales@generatorjoe.net

Web: www.generatorjoe.net

A small business owned by service a connected disabled veteran.

Cage 1U5V7 - TIN/EIN #943026355 - Duns #054590203



Made in the USA!



CONTRACTOR

GeneratorJoe®

Centurion MT Series
Model: 800 MT-3

© Copyright, GeneratorJoe Inc. All Rights Reserved