



**EPA-Certified for Stationary  
Emergency Applications**

**Ratings Range**


		60 Hz	50 Hz
Standby:	kW	44-55	40-46
	kVA	44-69	40-58

**Generator Set Ratings**

Alternator	Voltage	Ph	Hz	Natural Gas 130°C Rise		LP Gas 130°C Rise	
				Standby Rating kW/kVA	Amps	Standby Rating kW/kVA	Amps
4P7BX	120/208	3	60	50/63	173	52/65	180
	127/220	3	60	50/63	164	52/65	171
	120/240	3	60	50/63	150	52/65	156
	120/240	1	60	44/44	183	44/44	183
	139/240	3	60	50/63	150	52/65	156
	220/380	3	60	49/61	93	49/61	93
	277/480	3	60	50/63	75	52/65	78
	347/600	3	60	50/63	60	52/65	63
	110/190	3	50	40/50	152	42/53	161
	115/200	3	50	40/50	144	42/53	153
	120/208	3	50	40/50	139	42/53	147
	110/220	3	50	40/50	131	42/53	139
110/220	1	50	40/40	182	40/40	182	
220/380	3	50	40/50	76	42/53	81	
230/400	3	50	40/50	72	42/53	76	
240/416	3	50	40/50	69	42/53	73	
4P8X	120/208	3	60	51/64	177	53/66	184
	127/220	3	60	51/64	167	53/66	174
	120/240	3	60	51/64	153	53/66	159
	120/240	1	60	48/48	200	50/50	208
	139/240	3	60	51/64	153	53/66	159
	220/380	3	60	51/64	97	53/66	101
	277/480	3	60	51/64	77	53/66	80
	347/600	3	60	51/64	61	53/66	64
	110/190	3	50	42/52	158	44/55	167
	115/200	3	50	42/52	150	44/55	159
	120/208	3	50	42/52	144	44/55	153
	110/220	3	50	42/52	136	44/55	144
110/220	1	50	41/41	186	42/42	191	
220/380	3	50	42/52	79	44/55	84	
230/400	3	50	42/52	75	44/55	79	
240/416	3	50	42/52	72	44/55	76	
4P10X	120/208	3	60	53/66	183	55/69	192
	127/220	3	60	53/66	173	55/69	181
	120/240	3	60	53/66	159	55/69	166
	120/240	1	60	50/50	208	52/52	217
	139/240	3	60	53/66	159	55/69	166
	220/380	3	60	53/66	100	55/69	105
	277/480	3	60	53/66	79	55/69	83
	347/600	3	60	53/66	64	55/69	66
	110/190	3	50	44/55	167	46/58	175
	115/200	3	50	44/55	159	46/58	166
	120/208	3	50	44/55	153	46/58	160
	110/220	3	50	44/55	144	46/58	151
110/220	1	50	42/42	191	44/44	200	
220/380	3	50	44/55	84	46/58	87	
230/400	3	50	44/55	79	46/58	83	
240/416	3	50	44/55	76	46/58	80	
4Q7BX	120/240	1	60	50/50	208	50/50	208
	110/220	1	50	40/40	182	42/42	191
4Q8X	120/240	1	60	50/50	208	52/52	217
	110/220	1	50	41/41	186	44/44	200

**Standard Features**

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- At 60 Hz, the generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- A one-year limited warranty covers all systems and components. Two- and five-year extended warranties are also available.
- Alternator features:
  - The unique Fast-Response™ X excitation system delivers excellent voltage response and short-circuit capability using a rare-earth, permanent magnet (PM)-excited alternator.
  - The brushless, rotating-field alternator has broadrange reconnectability.

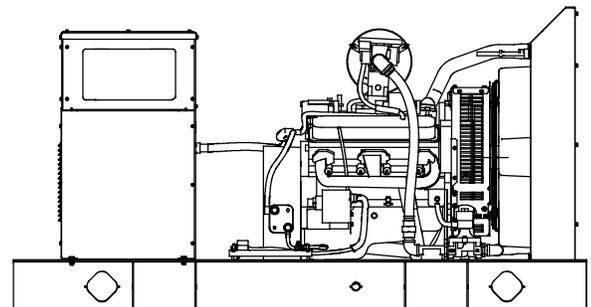

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor. *Standby Ratings:* The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. *Prime Power Ratings:* At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. For dual fuel engines, use the natural gas ratings for both the primary and secondary fuels.

# Alternator Specifications

Specifications	Alternator
Manufacturer	Kohler
Type	4-Pole, Rotating-Field
Exciter type	Brushless, Rare-Earth Permanent Magnet
Leads: quantity, type	
4PX	12, Reconnectable
4QX	4, 110-120/220-240
Voltage regulator	Solid State, Volts/Hz
Insulation:	NEMA MG1
Material	Class H
Temperature rise	130°C, Standby
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Voltage regulation, no-load to full-load	Controller Dependent
One-step load acceptance	100% of Rating
Unbalanced load capability	100% of Rated Standby Current
Peak motor starting kVA:	(35% dip for voltages below)
480 V, 400 V 4P7BX (12 lead)	180 (60 Hz), 136 (50 Hz)
480 V, 400 V 4P8X (12 lead)	261 (60 Hz), 218 (50 Hz)
480 V, 400 V 4P10X (12 lead)	275 (60 Hz), 220 (50 Hz)
240 V, 220 V 4Q7BX (4 lead)	113 (60 Hz), 95 (50 Hz)
240 V, 220 V 4Q8X (4 lead)	121 (60 Hz), 107 (50 Hz)

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.

## Application Data

### Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	General Motors	
Engine: model, type	Industrial Powertrain Vortec 5.0 L, 4-Cycle Natural Aspiration	
Cylinder arrangement	V-8	
Displacement, L (cu. in.)	5.0 (305)	
Bore and stroke, mm (in.)	94.9 x 88.4 (3.74 x 3.48)	
Compression ratio	9.4:1	
Piston speed, m/min. (ft./min.)	318 (1044)	265 (870)
Main bearings: quantity, type	5, M400 Copper Lead	
Rated rpm	1800	1500
Max. power at rated rpm, kW (HP)	66.4 (89)	54.5 (73)
Cylinder head material	Cast Iron	
Piston type and material	High Silicon Aluminum	
Crankshaft material	Nodular Iron	
Valve (exhaust) material	Forged Steel	
Governor type	Electronic	
Frequency regulation, no-load to full-load	Isochronous	
Frequency regulation, steady state	±0.5%	
Frequency	Fixed	
Air cleaner type, all models	Dry	

### Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dry	
Exhaust flow at rated kW, m <sup>3</sup> /min. (cfm)	15.6 (550)	12.2 (430)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	593 (1100)	
Maximum allowable back pressure, kPa (in. Hg)	10.2 (3.0)	
Exhaust outlet size at engine hookup, mm (in.)	76 (3.0) OD	

### Engine Electrical

Engine Electrical System	60 Hz	50 Hz
Ignition system	Electronic	
Battery charging alternator:		
Ground (negative/positive)	Negative	
Volts (DC)	12	
Ampere rating	70	
Starter motor rated voltage (DC)	12	
Battery, recommended cold cranking amps (CCA):		
Qty., rating for -18°C (0°F)	1, 630	
Battery voltage (DC)	12	

### Fuel

Fuel System	60 Hz	50 Hz
Fuel type	Natural Gas, LP Gas, or Dual Fuel	
Fuel supply line inlet	1 NPTF	
Natural gas fuel supply pressure, kPa (in. H <sub>2</sub> O)	1.74-2.74 (7-11)	
LPG vapor withdrawal fuel supply pressure, kPa (in. H <sub>2</sub> O)	1.24-2.74 (5-11)	
Dual fuel engine, LPG vapor withdrawal fuel supply pressure, kPa (in. H <sub>2</sub> O)	1.24 (5)	

Fuel Composition Limits *	Nat. Gas	LP Gas
Methane, % by volume	90 min.	—
Ethane, % by volume	4.0 max.	—
Propane, % by volume	1.0 max.	85 min.
Propene, % by volume	0.1 max.	5.0 max.
C <sub>4</sub> and higher, % by volume	0.3 max.	2.5 max.
Sulfur, ppm mass	25 max.	
Lower heating value, MJ/m <sup>3</sup> (Btu/ft <sup>3</sup> ), min.	33.2 (890)	84.2 (2260)

\* Fuels with other compositions may be acceptable. If your fuel is outside the listed specifications, contact your local distributor for further analysis and advice.

# Application Data

## Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, L (qt.)	4.3 (4.5)	
Oil pan capacity with filter, L (qt.)	4.7 (5.0)	
Oil filter: quantity, type	1, Cartridge	

## Cooling

Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F) *	50 (122)	
Engine jacket water capacity, L (gal.)	6.8 (1.8)	
Radiator system capacity, including engine, L (gal.)	20.8 (5.5)	
Engine jacket water flow, Lpm (gpm)	117.3 (31)	98.4 (26)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	51.5 (2930)	42.9 (2440)
Water pump type	Centrifugal	
Fan diameter, including blades, mm (in.)	533 (21)	
Fan, kWm (HP)	4.5 (6.0)	2.6 (3.5)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H <sub>2</sub> O)	0.125 (0.5)	

\* Enclosure with enclosed silencer reduces ambient temperature capability by 5°C (9°F).

## Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m <sup>3</sup> /min. (scfm)†	170 (6000)	136 (4800)
Combustion air, m <sup>3</sup> /min. (cfm)	5.0 (175)	4.0 (140)
Heat rejected to ambient air:		
Engine, kW (Btu/min.)	29.5 (1680)	23.6 (1340)
Alternator, kW (Btu/min.)	7.6 (430)	6.5 (370)

† Air density = 1.20 kg/m<sup>3</sup> (0.075 lbm/ft<sup>3</sup>)

Fuel Consumption ‡	60 Hz	50 Hz
<b>Natural Gas, m<sup>3</sup>/hr. (cfh) at % load</b>	<b>Standby Ratings</b>	
100%	21.1 (744)	17.0 (600)
75%	17.9 (631)	14.3 (505)
50%	13.7 (483)	10.9 (384)
25%	9.4 (333)	7.4 (262)


LP Gas, m <sup>3</sup> /hr. (cfh) at % load	60 Hz	50 Hz
100%	8.4 (295)	7.2 (254)
75%	6.5 (230)	5.7 (202)
50%	5.0 (178)	4.3 (153)
25%	3.7 (129)	3.0 (105)

‡ Nominal fuel rating: Natural gas, 37 MJ/m<sup>3</sup> (1000 Btu/ft.<sup>3</sup>)  
LP vapor, 93 MJ/m<sup>3</sup> (2500 Btu/ft.<sup>3</sup>)

LP vapor conversion factors:

8.58 ft.<sup>3</sup> = 1 lb.  
0.535 m<sup>3</sup> = 1 kg.  
36.39 ft.<sup>3</sup> = 1 gal.


## Controllers



### Decision-Maker® 3000 Controller

Provides advanced control, system monitoring, and system diagnostics for optimum performance and compatibility.

- Digital display and menu control provide easy local data access
  - Measurements are selectable in metric or English units
  - Remote communication thru a PC via network or serial configuration
  - Controller supports Modbus® protocol
  - Integrated hybrid voltage regulator with ±0.5% regulation
  - Built-in alternator thermal overload protection
  - NFPA 110 Level 1 capability
- Refer to G6-100 for additional controller features and accessories.



### Decision-Maker® 550 Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities.

- Digital display and keypad provide easy local data access
  - Measurements are selectable in metric or English units
  - Remote communication thru a PC via network or modem configuration
  - Controller supports Modbus® protocol
  - Integrated voltage regulator with ±0.25% regulation
  - Built-in alternator thermal overload protection
  - NFPA 110 Level 1 capability
- Refer to G6-46 for additional controller features and accessories.

## Standard Features

- Alternator Protection
- Battery Rack and Cables
- Electronic, Isochronous Governor
- Gas Fuel System (includes fuel mixer, electronic secondary gas regulator, gas solenoid valve, and flexible fuel line between the engine and the skid-mounted fuel system components)
- Integral Vibration Isolation
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature

## Available Options

### Approvals and Listings

- CSA Approval
- IBC Seismic Certification
- UL 2200 Listing

### Enclosed Unit

- Sound Enclosure (with enclosed critical silencer)
- Weather Enclosure (with enclosed critical silencer)

### Open Unit

- Exhaust Silencer, Critical (kit: PA-352663)
- Flexible Exhaust Connector, Stainless Steel

### Fuel System

- Dual Fuel NG/LPG (automatic changeover)
- Flexible Fuel Line (required when the generator set skid is spring mounted)
- Gas Filter
- LP Liquid Withdrawal (vaporizer)
- Secondary Gas Solenoid Valve

### Controller

- Common Fault Relay
- Communication Products and PC Software
- Customer Connection (Decision-Maker® 550 controller only)
- Input/Output Module (Decision-Maker® 3000 controller only)
- Remote Annunciator Panel
- Remote Audiovisual Alarm Panel (Decision-Maker® 550 controller only)
- Remote Emergency Stop
- Run Relay

### Cooling System

- Block Heater, 1500 W, 110-120 V (Recommended for ambient temperatures below 10°C (50°F))
- Radiator Duct Flange

### Electrical System

- Alternator Strip Heater
- Battery
- Battery Charger, Equalize/Float Type
- Battery Heater
- Line Circuit Breaker (NEMA1 enclosure)
- Line Circuit Breaker with Shunt Trip (NEMA1 enclosure)

### Miscellaneous

- Air Cleaner Restrictor Indicator
- Certified Test Report
- Engine Fluids Added
- Rated Power Factor Testing
- Rodent Guards

### Literature

- General Maintenance
- NFPA 110
- Overhaul
- Production

### Warranty


- 2-Year Basic
- 5-Year Basic
- 5-Year Comprehensive

### Other Options

- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

## Dimensions and Weights

Overall Size, L x W x H, mm (in.):	
Wide Skid	2200 x 1040 x 1175 (86.6 x 40.9 x 46.3)
Narrow Skid	2200 x 864 x 1175 (86.6 x 34.0 x 46.3)
Weight (radiator model), wet, kg (lb.):	878 (1937)

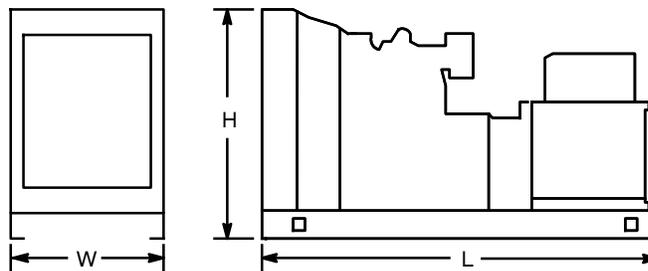

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

**DISTRIBUTED BY:**