







# SPECIFICATION DATA SHEET | Model: 05TCG

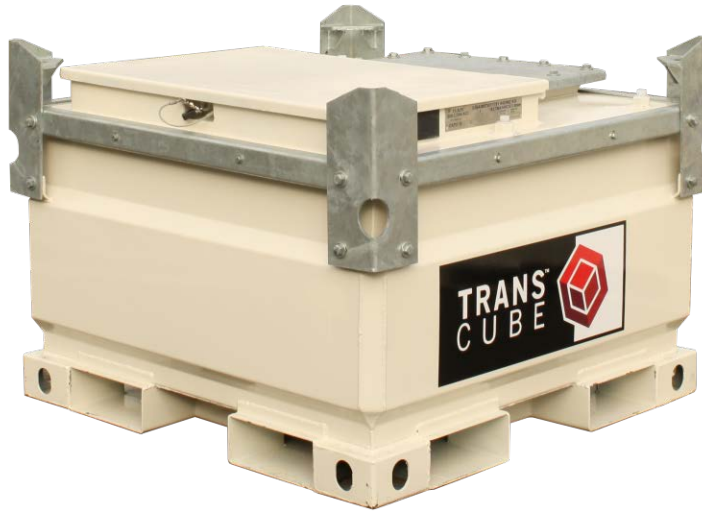

The **TRANSCUBE™ 05TCG** is ideal for use in stand-by power applications and refueling for smaller equipment, such as industrial heaters, small generators, lighting towers... and more!

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Stackable.** Easily stackable (2)-high full of fuel and (3)-high empty to reduce storage space requirements.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

## SPECIFICATION

**STANDARD FITTINGS:** High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent.

**OPTIONAL EQUIPMENT:** Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.

Capacity (brim full) Litres:	500	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	132	Inner Tank Material Thickness:	1/8"
Dimension Length (in):	46"	Weight Empty (Lbs):	965 lbs
Dimension Width (in):	46"	Weight Laden (Lbs):	1,901 lbs
Dimension Height (in):	35"	Design Approvals:	UL142,
Dimension Cabinet Opening:	33½"W x 14" H		UN IBC Type 31A, US DOT



# GeneratorJoe

**GeneratorJoe®**

4723 Muirfield Court  
Santa Rosa, CA 95405

Phone: 707 542-2224

Fax: 707 542-2227






Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)

Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

SPECIFICATION DATA SHEET | Model: 10TCG



The **TRANSCUBE™ 10TCG** is a compact, transportable, double-walled fuel tank. Quickly and easily supply fuel where you need it, when you need it.

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Stackable.** Easily stackable (2)-high full of fuel and (3)-high empty to reduce storage space requirements.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

### SPECIFICATION

STANDARD FITTINGS:	High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent.		
OPTIONAL EQUIPMENT:	Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		
Capacity (brim full) Litres:	1,000	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	264	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	46"	Weight Empty (Lbs):	1,118 lbs
Dimension Width (in):	46"	Weight Laden (Lbs):	2,994 lbs
Dimension Height (in):	52"	Design Approvals:	UL142,
Dimension Cabinet Opening:	33½"W x 14" H		UN IBC Type 31A, US DOT



# GeneratorJoe

**GeneratorJoe®**






4723 Muirfield Court  
 Santa Rosa, CA 95405  
 Phone: 707 542-2224  
 Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
 Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

# SPECIFICATION DATA SHEET | Model: 20TCG



The **TRANSCUBE™ 20TCG** is a multi-task on-site fuel deployment solution for the direct supply to stationary diesel engines or the refueling of equipment on demand.

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Stackable.** Easily stackable (2)-high full of fuel and (3)-high empty to reduce storage space requirements.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

## SPECIFICATION

STANDARD FITTINGS:	High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent.		
OPTIONAL EQUIPMENT:	Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		
Capacity (brim full) Litres:	2,000	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	528	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	87"	Weight Empty (Lbs):	1,825 lbs
Dimension Width (in):	46"	Weight Laden (Lbs):	5,574 lbs
Dimension Height (in):	52"	Design Approvals:	UL 142,
Dimension Cabinet Opening:	33½"W x 14" H		UN IBC Type 31A, US DOT



# GeneratorJoe

**GeneratorJoe®**

4723 Muirfield Court  
Santa Rosa, CA 95405

Phone: 707 542-2224

Fax: 707 542-2227






Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)

Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

SPECIFICATION DATA SHEET | Model: 30TCG



Extend the run times of your diesel powered equipment with the **TRANSCUBE™ 30TCG**.  
*Increased Efficiency + Decreased Expenses = Maximized Revenue.*

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Stackable.** Easily stackable (2)-high full of fuel and (3)-high empty to reduce storage space requirements.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

### SPECIFICATION

STANDARD FITTINGS:	High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent.		
OPTIONAL EQUIPMENT:	Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		
Capacity (brim full) Litres:	3,000	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	792	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	91"	Weight Empty (Lbs):	2,153 lbs
Dimension Width (in):	60"	Weight Laden (Lbs):	7,765 lbs
Dimension Height (in):	52"	Design Approvals:	UL 142,
Dimension Cabinet Opening:	33½"W x 14" H		UN IBC Type 31A, US DOT



# GeneratorJoe

**GeneratorJoe®**






4723 Muirfield Court  
 Santa Rosa, CA 95405  
 Phone: 707 542-2224  
 Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
 Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

SPECIFICATION DATA SHEET | Model: 40TCG



The TRANSCUBE 40TCG is a versatile fuel deployment solution for larger diesel-powered equipment. With 1,000 gallons of back-up fuel, your need for fuel truck visits is decreased, which in turn helps you to lower your carbon footprint and your expenses!

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Stackable.** Easily stackable (2)-high full of fuel and (3)-high empty to reduce storage space requirements.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

### SPECIFICATION

STANDARD FITTINGS:	High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent.		
OPTIONAL EQUIPMENT:	Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		
Capacity (brim full) Litres:	3,790	Bund Material Thickness:	1/8"
Capacity (brim full) Gallons:	1,000	Inner Tank Material Thickness:	1/8"
Dimension Length:	91"	Weight Empty:	2,370 lbs
Dimension Width:	87"	Weight Laden:	9,370 lbs
Dimension Height:	48"	Design Approvals:	UL142,
Dimension Cabinet Opening:		Design Standards:	UN IBC Type 31A, US DOT



# GeneratorJoe

**GeneratorJoe®**

4723 Muirfield Court  
Santa Rosa, CA 95405

Phone: 707 542-2224

Fax: 707 542-2227

Email: [sales@generatorjoe.net](mailto:sales@generatorjoe.net)






Web: [www.generatorjoe.net](http://www.generatorjoe.net)



SPECIFICATION DATA SHEET | Model: 50TCG



The **TRANSCUBE™ 50TCG** is a versatile fuel deployment solution for larger diesel-powered equipment. With 1,240 gallons of back up fuel, your need for fuel truck visits is decreased, which in turn helps you to lower your carbon footprint and your expenses!

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Stackable.** Easily stackable (2)-high full of fuel and (3)-high empty to reduce storage space requirements.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

### SPECIFICATION

STANDARD FITTINGS:	High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent.		
OPTIONAL EQUIPMENT:	Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		
Capacity (brim full) Litres:	4,700	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	1,240	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	91"	Weight Empty (Lbs):	3,576 lbs
Dimension Width (in):	91"	Weight Laden (Lbs):	12,335 lbs
Dimension Height (in):	52"	Design Approvals:	UL142,
Dimension Cabinet Opening:	33½"W x 14" H		UN IBC Type 31A, US DOT



# GeneratorJoe

**GeneratorJoe®**





4723 Muirfield Court  
 Santa Rosa, CA 95405  
 Phone: 707 542-2224  
 Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
 Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

SPECIFICATION DATA SHEET | Model: RT05TCG



The **TRANSCUBE™** RT Highway Trailer can turn your standard **TRANSCUBE™** unit into a fully mobile refueller.

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

### SPECIFICATION

STANDARD FITTINGS:	TANK: High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent. TRAILER: Front anti-slip step for access to equipment cabinet; adjustable jack stand; highway lighting; electric braking; adjustable eye-ball hitch; heavy duty fenders.		
OPTIONAL EQUIPMENT:	TANK: Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		

Capacity (brim full) Litres:	500	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	132	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	97"	Weight Empty (Lbs):	1,485 lbs
Dimension Width (in):	67"	Weight Laden (Lbs):	2,475 lbs
Dimension Height (in):	68"	Design Approvals:	UL 142, UN IBC Type 31A, US DOT
Dimension Cabinet Opening:	33½"W x 14" H		



# GeneratorJoe

**GeneratorJoe®**





4723 Muirfield Court  
 Santa Rosa, CA 95405  
 Phone: 707 542-2224  
 Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
 Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

SPECIFICATION DATA SHEET | Model: RT10TCG



The **TRANSCUBE™** RT Highway Trailer can turn your standard **TRANSCUBE™** unit into a fully mobile refueller.

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

## SPECIFICATION

STANDARD FITTINGS:	TANK: High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent. TRAILER: Front anti-slip step for access to equipment cabinet; adjustable jack stand; highway lighting; electric braking; adjustable eye-ball hitch; heavy duty fenders.		
OPTIONAL EQUIPMENT:	TANK: Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		

Capacity (brim full) Litres:	1,000	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	264	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	97"	Weight Empty (Lbs):	1,638 lbs
Dimension Width (in):	67"	Weight Laden (Lbs):	3,514 lbs
Dimension Height (in):	68"	Design Approvals:	UL 142,
Dimension Cabinet Opening:	33½"W x 14" H		UN IBC Type 31A, US DOT



# GeneratorJoe

**GeneratorJoe®**

4723 Muirfield Court  
 Santa Rosa, CA 95405  
 Phone: 707 542-2224  
 Fax: 707 542-2227





Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
 Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)



SPECIFICATION DATA SHEET | Model: RT20TCG



The **TRANSCUBE™** RT Highway Trailer can turn your standard **TRANSCUBE™** unit into a fully mobile refueller.

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

## SPECIFICATION

STANDARD FITTINGS:	TANK: High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent. TRAILER: Front anti-slip step for access to equipment cabinet; adjustable jack stand; highway lighting; electric braking; adjustable eye-ball hitch; heavy duty fenders.		
OPTIONAL EQUIPMENT:	TANK: Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		

Capacity (brim full) Litres:	2,000	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	528	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	145"	Weight Empty (Lbs):	2,865 lbs
Dimension Width (in):	71"	Weight Laden (Lbs):	5,797 lbs
Dimension Height (in):	71"	Design Approvals:	UL 142, UN IBC Type 31A, US DOT
Dimension Cabinet Opening:	33½"W x 14" H		



# GeneratorJoe

**GeneratorJoe®**





4723 Muirfield Court  
 Santa Rosa, CA 95405  
 Phone: 707 542-2224  
 Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
 Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

SPECIFICATION DATA SHEET | Model: RT30TCG



The TRANSCUBE™ RT Highway Trailer can turn your standard TRANSCUBE™ unit into a fully mobile refueller.

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

**SPECIFICATION**

STANDARD FITTINGS:	TANK: High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent. TRAILER: Front anti-slip step for access to equipment cabinet; adjustable jack stand; highway lighting; electric braking; adjustable eye-ball hitch; heavy duty fenders.		
OPTIONAL EQUIPMENT:	TANK: Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		
Capacity (brim full) Litres:	3,000	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	792	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	149"	Weight Empty (Lbs):	3,425 lbs
Dimension Width (in):	84"	Weight Laden (Lbs):	9,037 lbs
Dimension Height (in):	71"	Design Approvals:	UL 142,
Dimension Cabinet Opening:	33½"W x 14" H		UN IBC Type 31A, US DOT



**GeneratorJoe**

**GeneratorJoe®**





4723 Muirfield Court  
 Santa Rosa, CA 95405  
 Phone: 707 542-2224  
 Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
 Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)

SPECIFICATION DATA SHEET | Model: RT50TCG



The **TRANSCUBE™** RT Highway Trailer can turn your standard **TRANSCUBE™** unit into a fully mobile refueller.

-  **Transportable.** Full load lifting eyes, forklift pockets and internal baffles designed to allow handling of the tank full of fuel.
-  **Accessible.** Access manway for maintenance and inspection of inner tank. Removable inner tank for servicing and cleaning.
-  **Efficient.** ENVIROconnect Equipment Cabinet locks and secures equipment and fuel ports to run up to 3 pieces of diesel-powered equipment.
-  **Environmentally Safe.** Double-walled, 110% containment eliminates the need for spill pans, UL 142 approved.

## SPECIFICATION

STANDARD FITTINGS:	TANK: High accuracy contents gauge; 3" Fill Point; 2" fusible link fill port; 1" pump feed with flexible dip pipe, strainer & non-return valve; (1) engine feed and return port set; pressure/vacuum vent; breather vent. TRAILER: Front anti-slip step for access to equipment cabinet; adjustable jack stand; highway lighting; electric braking; adjustable eye-ball hitch; heavy duty fenders.		
OPTIONAL EQUIPMENT:	TANK: Complete transfer pump kits; water & particulate filter kits; fuel up to (2) feed & return blocks; fuel hose & quick couplers.		

Capacity (brim full) Litres:	4,688	Bund Material Thickness (in):	1/8"
Capacity (brim full) Gallons (UK/US):	1,240	Inner Tank Material (thickness):	1/8"
Dimension Length (in):	180"	Weight Empty (Lbs):	4,600 lbs
Dimension Width (in):	96"	Weight Laden (Lbs):	16,100 lbs
Dimension Height (in):	71"	Design Approvals:	UL 142, UN IBC, Type 31A, US DOT
Dimension Cabinet Opening:	33½"W x 14" H		



# GeneratorJoe

**GeneratorJoe®**

4723 Muirfield Court  
Santa Rosa, CA 95405  
Phone: 707 542-2224  
Fax: 707 542-2227

Email: [sales@generatorjoe.Net](mailto:sales@generatorjoe.Net)  
Web: [www.generatorjoe.NET](http://www.generatorjoe.NET)