


NOTES:-
 ENGINE: VOLVO TAD1241GE
 ALTERNATOR: NEWAGE HCKI434F (SINGLE BEARING)
 RADIATOR: SUPPLIED WITH ENGINE
 A.V. MOUNTS: AVA P5 SERIES - 6 OFF

GEN-SET DETAILS:-
 POWER RATING 413kVA
 VOLTAGE 415
 FREQUENCY 50Hz
 FOR ALL OTHER DETAILS,
 SEE BROADCAST LITERATURE

WEIGHTS:-
 ENGINE, c/w Radiator: 1380Kg DRY, 1455Kg WET
 ALTERNATOR: 1170Kg
 BASEFRAME: 762Kg DRY, 1083Kg WET.



TOTAL WET WEIGHT OF GEN-SET = 3708Kg

COLOURS:-
 Baseframe, Alternator & Radiator: Semi-Gloss Black
 Engine: RAL:1006 (Maize Yellow)

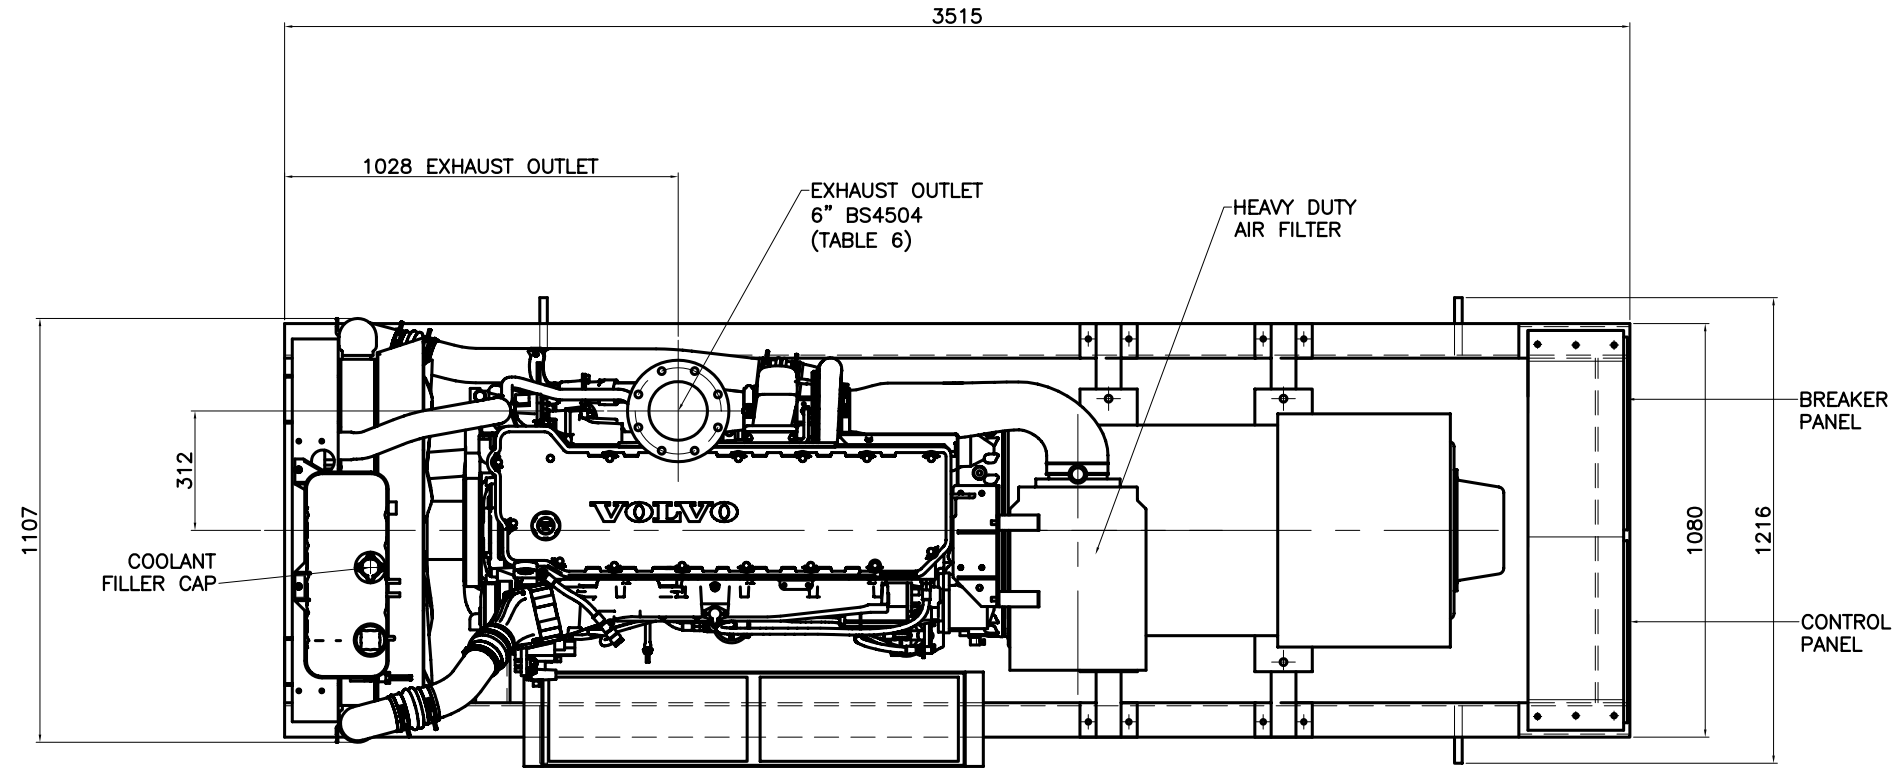


GeneratorJoe

4016 Quartz Drive
 Santa Rosa, CA 95405
 Phone: 707 539-9003
 Fax: 707 539-5212
 Email: sales@generatorjoe.NET
 Web www.generatorjoe.NET

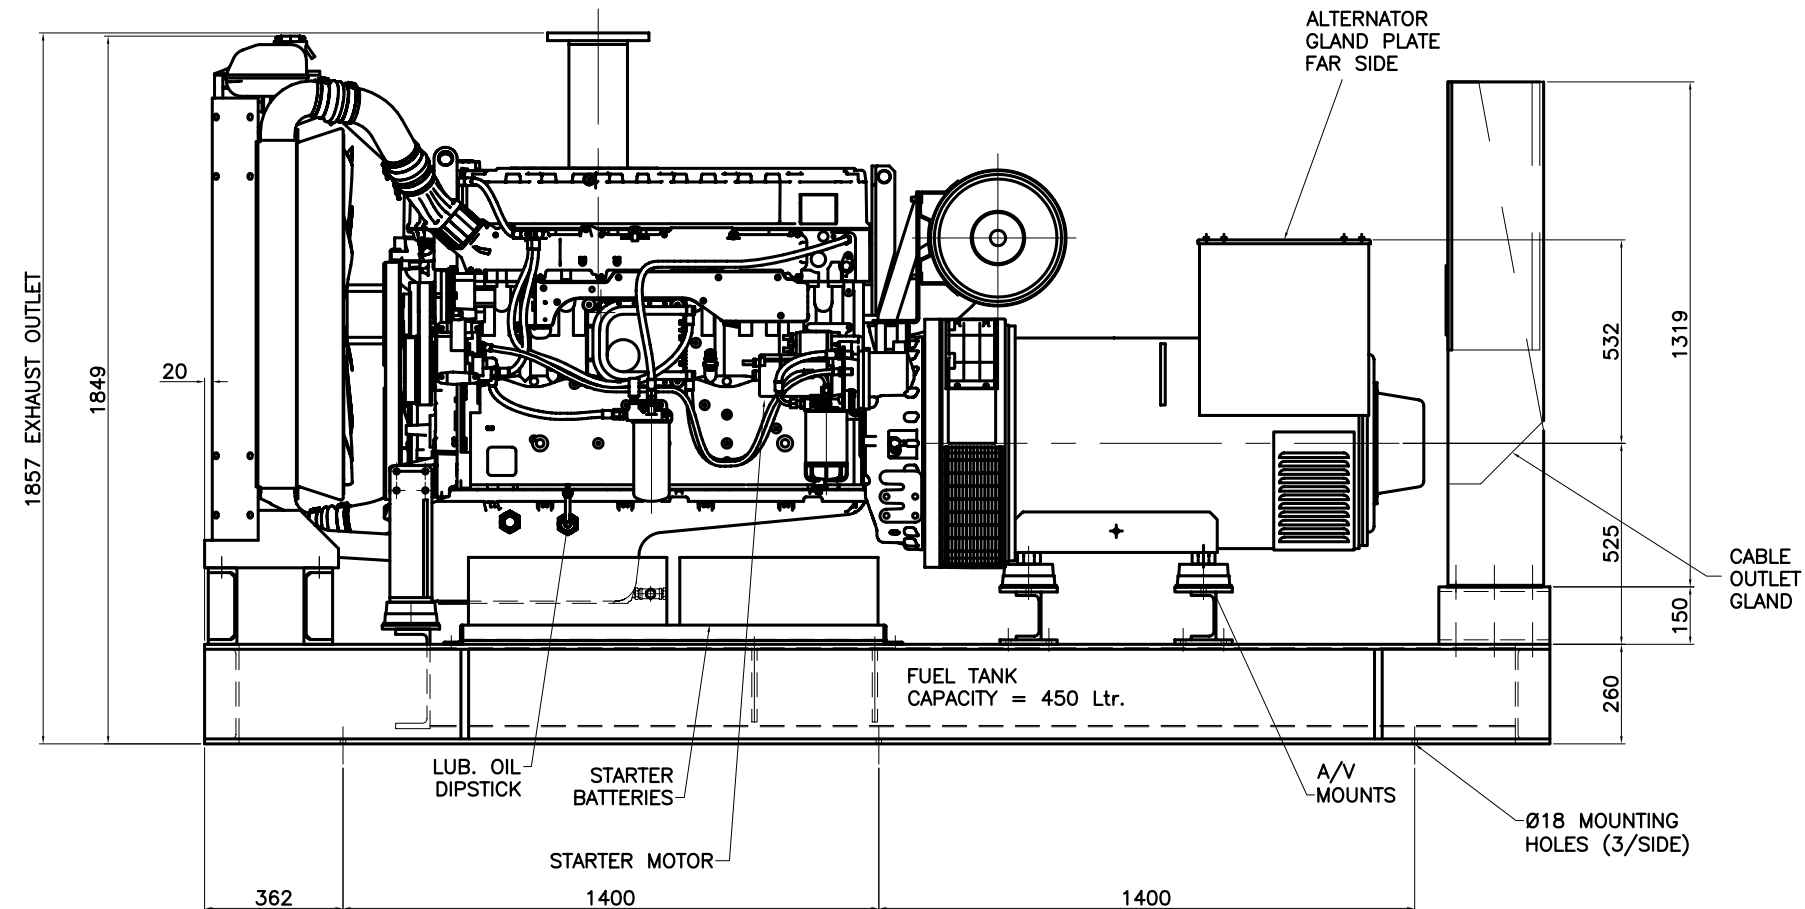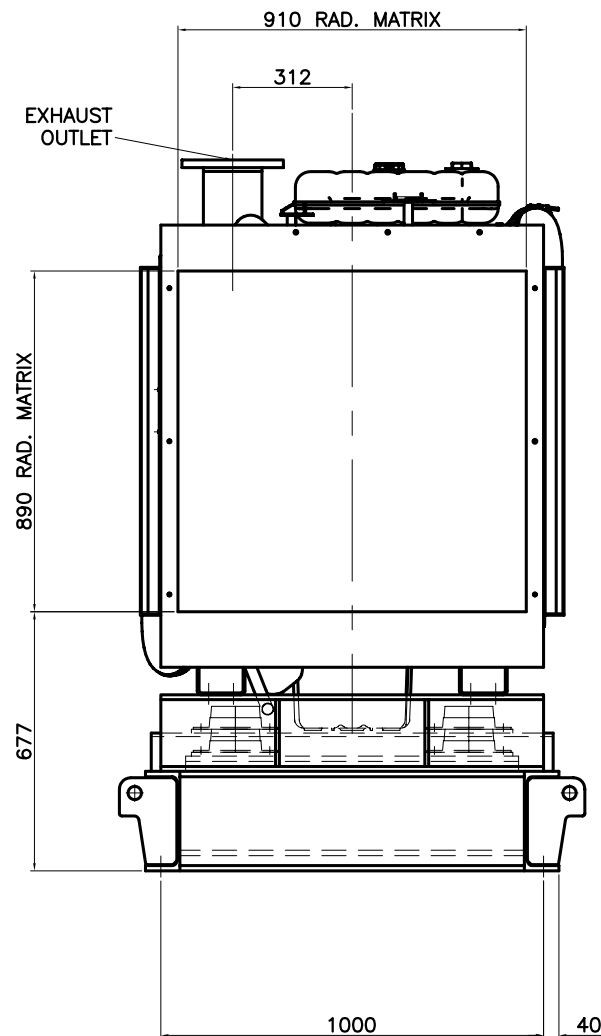

No.	ALTERATIONS	CHK'D DATE
NOTES		

TOLERANCES:
 GENERAL TOLERANCE + / - 5mm
 FABRICATION + / - 3mm
 HOLE CENTRES + / - 1mm
 OTHER TOLERANCES AS STATED
 WHERE REQUIRED



SUBJECT TO APPROVAL BY CUSTOMER	CUSTOMER APPROVAL GRANTED	
	DATE:	REF:
<input type="checkbox"/> No	PROJECT MANAGER	

TITLE: GEN-SET GENERAL ARRANGEMENT
 CLIENT:
 SITE:
 W.O. No.: ENGINEER: SKM
 TYPE: BCV400P CHECKED: SKM
 SCALE: 1:10 DATE: 30.08.07
 TOTAL No. OF SHEETS 1
 DRAWING NO. ISSUE
 H BCV400P-GA01-AI A

BROADCAST