




NOTES:-  
 ENGINE: VOLVO TAD1241GE  
 ALTERNATOR: NEWAGE HCKI434F (SINGLE BEARING)  
 RADIATOR: SUPPLIED WITH ENGINE  
 A.V. MOUNTS: AVA P5 SERIES - 6 OFF

GEN-SET DETAILS:-  
 POWER RATING 413kVA  
 VOLTAGE 415  
 FREQUENCY 50Hz  
 FOR ALL OTHER DETAILS,  
 SEE BROADCAST LITERATURE

WEIGHTS:-  
 ENGINE, c/w Radiator: 1380Kg DRY, 1455Kg WET  
 ALTERNATOR: 1170Kg  
 BASEFRAME: 762Kg DRY, 1083Kg WET.

TOTAL WET WEIGHT OF GEN-SET = 3708Kg

COLOURS:-  
 Baseframe, Alternator & Radiator: Semi-Gloss Black  
 Engine: RAL:1006 (Maize Yellow)

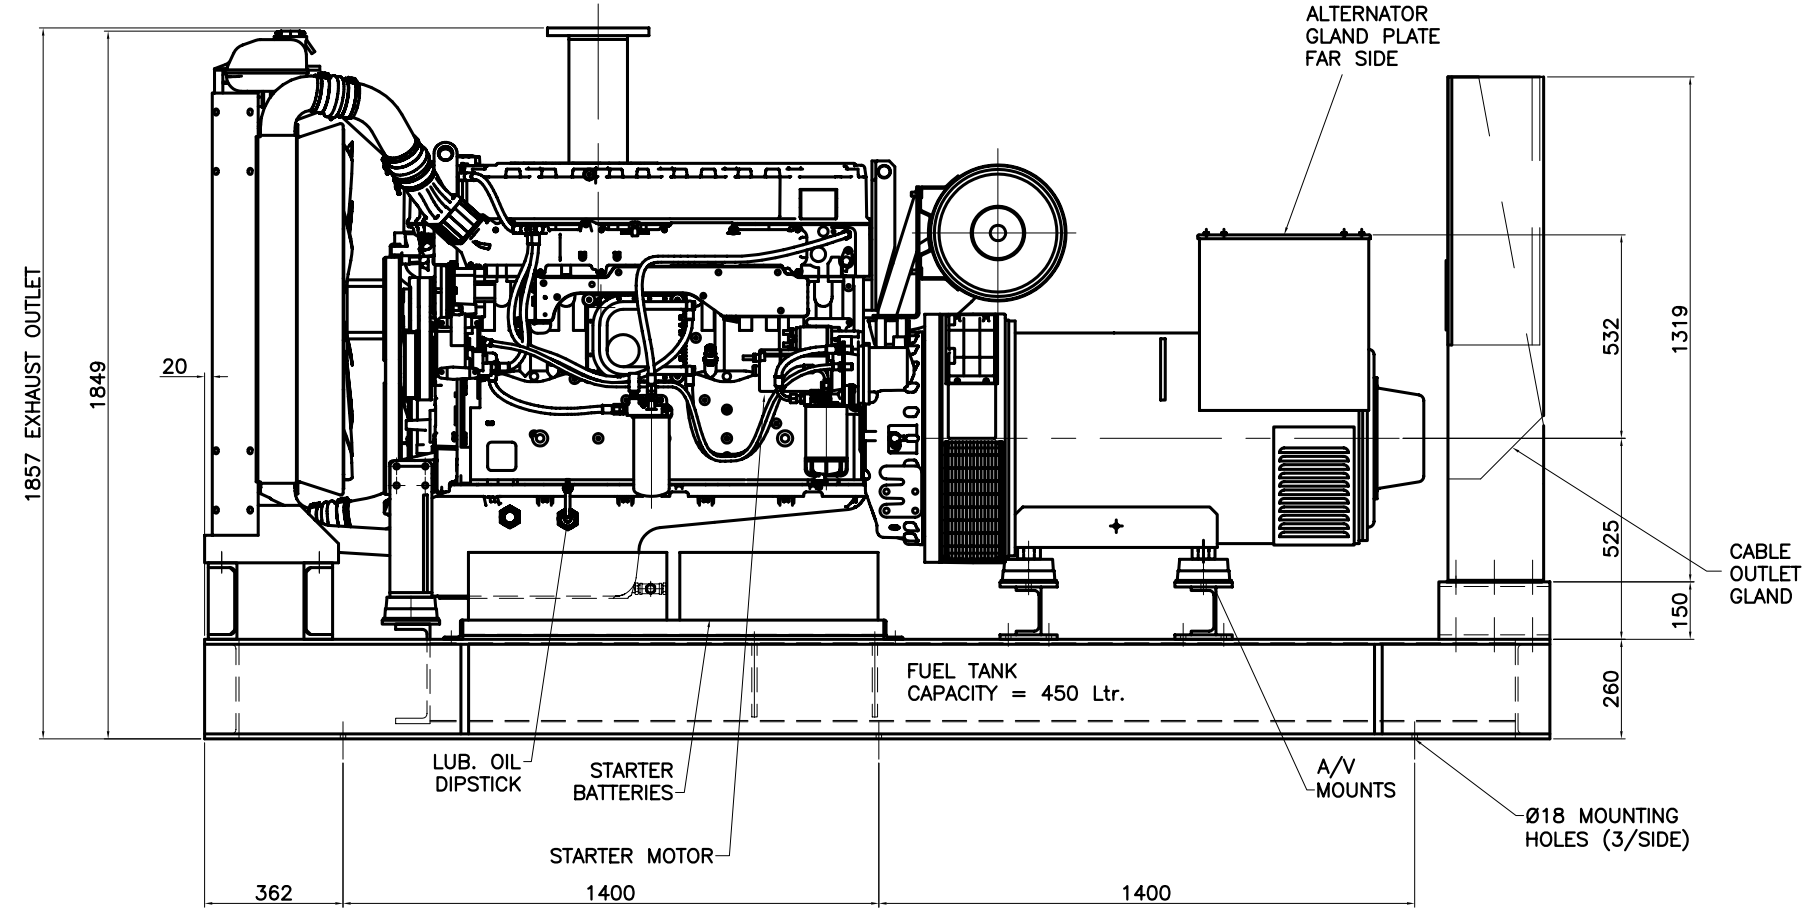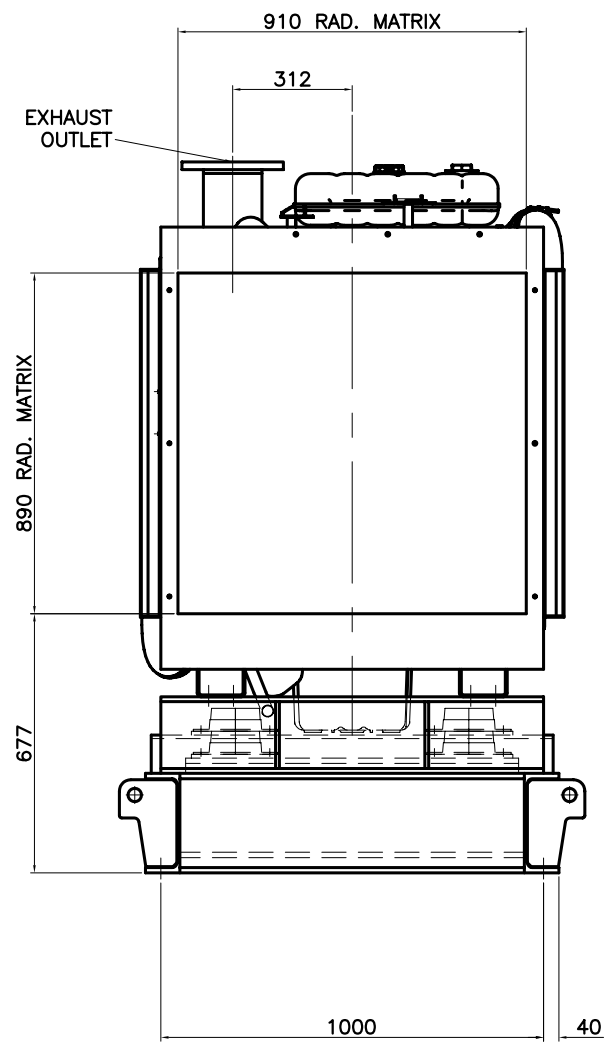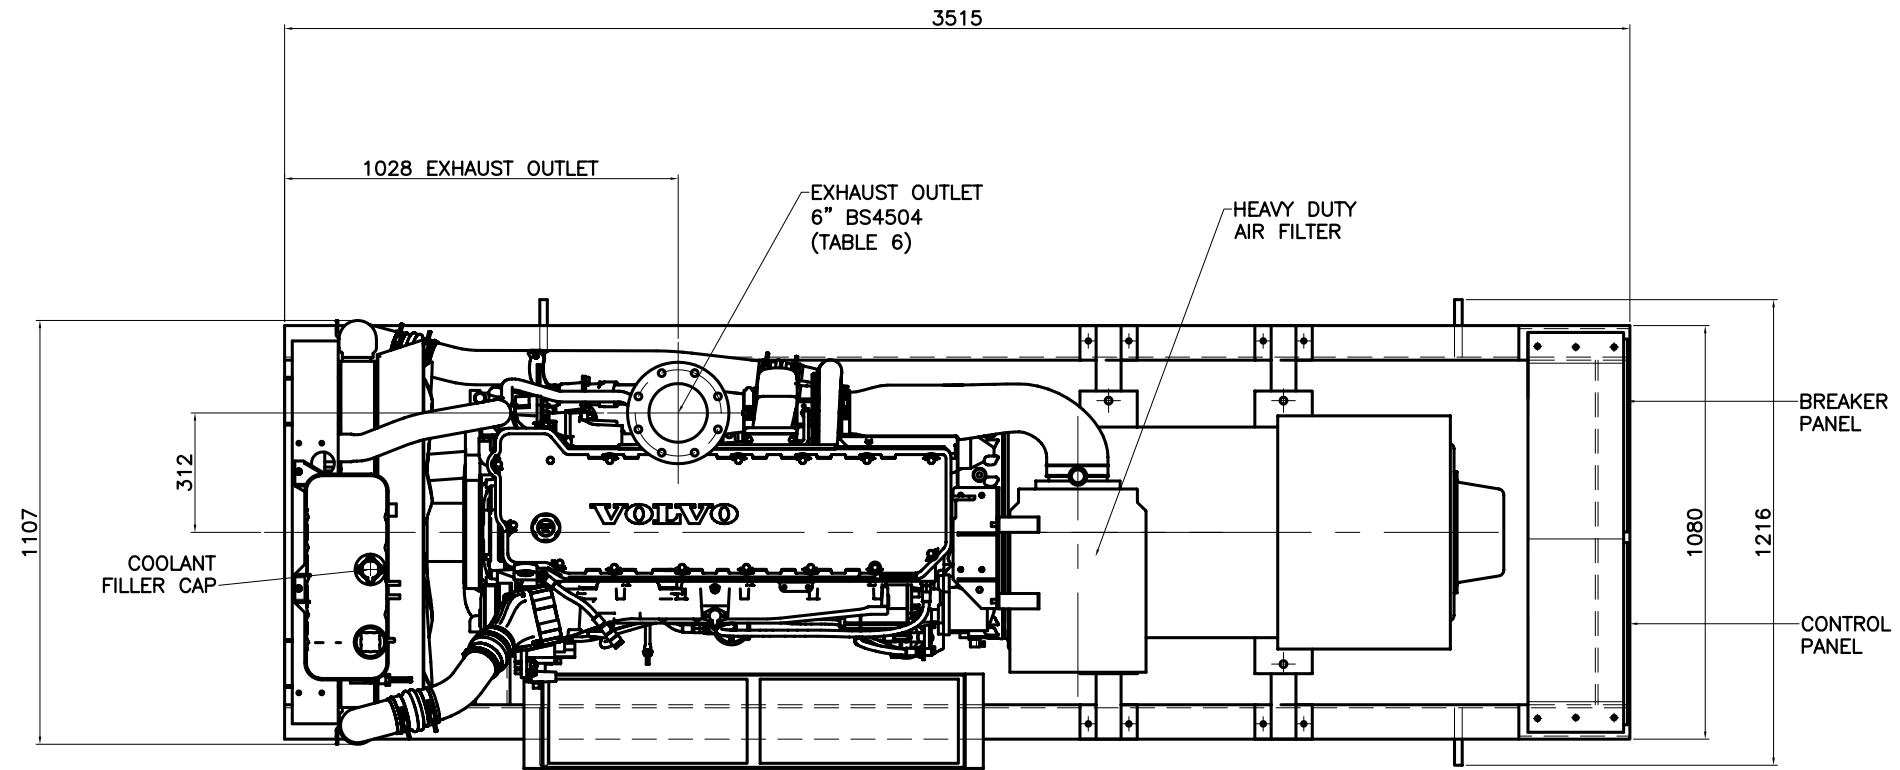

**GeneratorJoe**

4016 Quartz Drive  
 Santa Rosa, CA 95405  
 Phone: 707 539-9003  
 Fax: 707 539-5212  
 Email: sales@generatorjoe.NET  
 Web www.generatorjoe.NET

No.:	ALTERATIONS	CHK'D DATE
NOTES		
TOLERANCES: GENERAL TOLERANCE + / - 5mm FABRICATION + / - 3mm HOLE CENTRES + / - 1mm OTHER TOLERANCES AS STATED WHERE REQUIRED		
 THIRD ANGLE PROJECTION		DO NOT SCALE IF IN DOUBT ASK
SUBJECT TO APPROVAL BY CUSTOMER	CUSTOMER APPROVAL GRANTED	
<input type="checkbox"/> No	DATE:	REF:
	PROJECT MANAGER	
TITLE: GEN-SET GENERAL ARRANGEMENT		
CLIENT:		
SITE:		
W.O. No.:	ENGINEER: SKM	
TYPE: BCV400P	CHECKED: SKM	
SCALE: 1:10	DATE: 30.08.07	
TOTAL No. OF SHEETS		1
DRAWING NO.		ISSUE
BCV400P-GA01-AI		A
<b>BROADCAST</b>		