


DYNA[®]

Portable Generators by **WINCO**[®]

FEATURING HONDA
AND BRIGGS &
STRATTON ENGINES

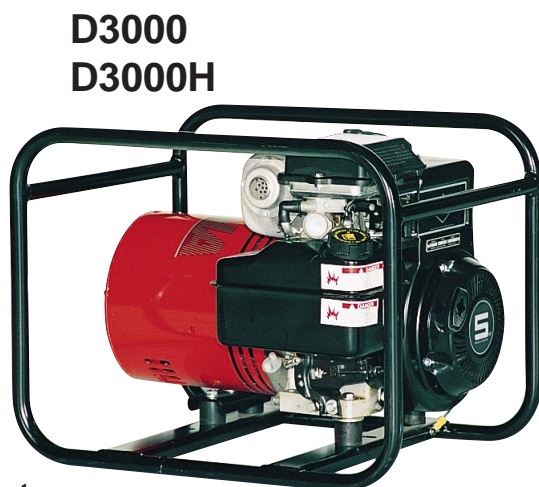

**D3000
D3000H**



GeneratorJoe

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax: 707 539-5212
Email: sales@generatorjoe.NET
Web www.generatorjoe.NET

**D4500
D5000H**

Performance & Technical Data

Model Number	D3000	D3000H	D4500	D5000H
Electrical Specifications				
Maximum Power Rating (2)	3000 watts	3000 watts	4500 watts	5000 watts
Continuous Power Rating (2)**	2500 watts	2300 watts	4000 watts	4500 watts
A.C. Output Voltage	120 volts	120 volts	120/240 volts	120/240 volts
Continuous Current Rating	20.8 amps	19.1 amps	33.4/16.7 amps	37.4/18.7 amps
Motor Starting Ability (1)	1.0 hp	.75 hp	1.5 hp	1.5 hp
Engine Data				
Make/Model	B&S/INTEK	Honda GC160	B&S/STD	Honda GX270
Displacement/Type	206 c.c.	160 c.c. OHC	319 c.c.	270 c.c. OHV
Rated Power (3600 rpm)	5.5 hp	5 hp	8 hp	9 hp
Low Oil Protection	N/A	Standard	N/A	Standard
Starting System	Recoil	Recoil	Recoil	Recoil
Fuel Tank Capacity	3 Qt	2 Qt	4 Qt	6 Qt
Running Time-Full Load (2)	1.4 hours	1.1 hours	1.2 hours	2.4 hours
Running Time-Half Load (2)	2.0 hours	1.5 hours	1.7 hours	3.3 hours
120 Volt Receptacles				
Straight Blade (NEMA 5-15R)	2-15 amp	2-15 amp	2-15 amp	2-15 amp
Straight Blade (NEMA 5-20R)				
120/240 Volt Receptacles				
Twist-Lock (NEMA L14-30R)			1-30 amp	1-30 amp
Size & Weight				
Dimensions (LxWxH)	20.75x15x16 in.	20.75x15x16 in.	24x20x19 in.	24x20x19 in.
Shipping Weight	92 lbs.	92 lbs.	124 lbs.	138 lbs.
Warranty Information -Consumer Application (3)				
Generator/Engine	2 yrs/1 yr	2 yrs/1 yr	2 yrs/1 yr	2 yrs/2 yrs

NOTES: (1) Code G Capacitor Start Motor. (2) Based on gasoline fuel. (3) COMMERCIAL OR PRIME POWER WARRANTY - 90 DAYS;
INTERNATIONAL WARRANTY - Contact WINCO for details.

** Power Output +/-5%

Dyna 3/01

DL4500
DL4500E
DL5000H



DL6000
DL6000E
DL6000H
DL6000HE



DL9000E
DL9500HE



PERFORMANCE & TECHNICAL DATA


Model Number	DL4500 DL4500E	DL5000H	DL6000 DL6000E	DL6000H DL6000HE	DL9000E	DL9500HE
Electrical Specifications						
Maximum Power Rating	4500 watts	5000 watts	6000 watts	6000 watts	9000 watts	9500
Continuous Power Rating**	4000 watts	4500 watts	5500 watts	5500 watts	8000 watts	8500
A.C. Output Voltage	120 /240 volts	120 /240 volts	120 /240 volts	120 /240 volts	120 /240 volts	120/240 volts
Continuous Current Rating	33.4/16.7 amps	37.4/18.7 amps	45.8/22.9 amps	45.8/22.9 amps	66.7/33.3 amps	70.8/35.4
Motor Starting Ability (1)	1.5 hp	1.5 hp	2 hp	2 hp	4 hp	5 hp
Engine Data						
Make/Model	B&S/STD	Honda GX270	B&S/STD	Honda GX340	B&S Vanguard	Honda GX610
Displacement/Type	319 c.c.	270 c.c./OHV	400 c.c.	337 c.c./OHV	480 c.c./OHV	610 c.c./OHV
Rated Power (3600 rpm)	8 hp	9 hp	11 hp	11 hp	16 hp	18 hp
Starting System (2)	(3)	Recoil	(3)	(3)	Electric/Recoil	Electric
Fuel Tank Capacity	4.5 gallons	4.5 gallons	4.5 gallons	4.5 gallons	4.5 gallons	4.5 gallons
Low Oil Protection	Standard	Standard	Standard	Standard	Standard	Standard
Running Time-Full Load	5.2 hours	6.6 hours	4.2 hours	4.5 hours	3.4 hours	3.2 hours
Running Time-Half Load	7.5 hours	10.3 hours	6.0 hours	6.4 hours	5.6 hours	5.3 hours
120 Volt Receptacles						
Straight Blade (NEMA 5-15R)	2-15 amp	2-15 amp	2-15 amp	2-15 amp	4-15 amp	4-15 amp
120/240 Volt Receptacles						
Twist-Lock (NEMA L14-30R)	1-30 amp	1-30 amp	1-30 amp	1-30 amp	1-30 amp	1-30 amp
Size & Weight						
Dimensions (LxWxH)	28x19x22 in.	30x19x22 in.	30x22x22 in.	30x22x22 in.	32x22x22 in.	32x22x22 in.
Shipping Weight	139 lbs.	150 lbs.	208 lbs.	210 lbs.	270 lbs.	292 lbs.
Warranty Information - Consumer Application (4)						
Generator/Engine	2 yrs/1 yr	2 yrs/2 yrs	2 yrs/1 yr	2 yrs/2 yrs	2 yrs/2 yrs	2 yrs/2 yrs

NOTES: (1) Code G Capacitor Start Motor. (2) Electric start models include battery rack and cables. Battery not included.
(3) Models DL4500, DL6000, and DL6000H are recoil start only. Models DL4500E, DL6000E, and DL6000HE
have both recoil and electric start. (4) COMMERCIAL OR PRIME POWER WARRANTY - 90 DAYS;
INTERNATIONAL WARRANTY - Contact WINCO for details.

** Power Output +/-5%

Accessories available

Wheel Kit Spark Arrestors
Generator Cover



All of the DYNA models give you heavy duty performance from their lightweight packages. Each of the models have all copper windings and circuit breakers for operator safety and protection against damaging overloads. Packed full of value, each of these units will pay for themselves in one emergency application. Check the listing of accessories available for each model and customize a package to suit your needs.

GeneratorJoe

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax : 707 539-3212

Email: ..sales@generatorjoe.NET
Web www.generatorjoe.NET